


VARDAFLEX COB NEON TVQ

81205, 81207

MONTAGE- UND BETRIEBSANLEITUNG
MOUNTING AND OPERATING INSTRUCTIONS



IP67

ELEKTROTECHNISCHE SICHERHEITSHINWEISE:

Der **VARDAFLEX** LED-Strip ist nur für die Installation im Innen- und Außenbereich sowie Nassräumen geeignet.

Stromschlaggefahr!

Beauftragen Sie mit der Installation eine Elektrofachkraft. Für Leuchten, die nicht gemäß den europäischen Sicherheitsrichtlinien installiert wurden, entfällt jeder Haftungsanspruch.

Achtung!

VARDAFLEX LED-Strip nur an geeignetes Netzgerät (24 V DC) anschließen.

Nur komplett abgerollt betreiben.

VARDAFLEX LED-Strips in Parallelschaltung verbinden.

 Bei Beschädigung der weißen Streuschicht ist das schadhafte Segment zu entfernen, um eine Augenverletzung durch das blaue Licht der LED zu verhindern.

LIEFERUMFANG:

1 x 5 Meter **VARDAFLEX** LED-Strip

PRÜFZEICHEN UND SYMBOLE:



CE-konform mit den zutreffenden europäischen Richtlinien.




RoHS-Prüfzeichen für Produkte, die keine Schwermetalle beinhalten (2011/65/EU)



REACH-Prüfzeichen für Produkte, deren chemische Bestandteile bekannt, registriert und zugelassen sind. (1907/2006/EG)



Schutzklasse III



Parallelanschluss:
Für die Durchgangsverdrahtung geeignet.

IP67

Geschützt gegen zeitweiliges Untertauchen

TECHNISCHE DATEN:

Spannungsversorgung:

24 V Netzgerät mit konstanter Ausgangsspannung

Leistung:

75W

Stromstärke:

3,125

Ausstrahlwinkel:

150°

Anzahl LED:

1190

Länge:

Maximal 5 Meter pro Anschluss

Abmessungen:

5000 x 10 x 6,7 mm

Biegedurchmesser:

50 mm

Lebensdauer:

L₇₀ B₅₀: 54.000 h

ENTSORGUNG:



Entsorgen Sie elektrische und elektronische Geräte umweltgerecht. Nähere Informationen erhalten Sie bei Ihrer zuständigen Behörde.

MONTAGE:

⚠ Vor der Installation Spannung abschalten. Sicherstellen, dass die Spannung nicht versehentlich wieder eingeschaltet werden kann.

ℹ **VARDIFLEX** LED-Strip, sofern vorhanden, erst an einen Controller und dann an das Netzgerät anschließen (nicht im Lieferumfang enthalten).

⚠ Achtung!
Bei stromführenden Oberflächen Isolierschicht zwischen **VARDIFLEX** LED-Strip und Oberfläche anbringen. Oberflächen müssen eben, staub- und fettfrei sowie trocken sein.

1. Oberfläche vorbereiten.
2. **VARDIFLEX** LED-Strip, falls erforderlich, kürzen (Bild 1).
3. Schutzfolie abziehen und **VARDIFLEX** LED-Strip mit leichtem Druck anpressen, dabei nicht direkt auf die elektronischen Bauteile drücken.
4. **VARDIFLEX** LED-Strip an Spannungsversorgung anschließen.

LED-PLATINE KÜRZEN:

⚠ Stromschlaggefahr!
Vor dem Kürzen immer Spannung freischalten.
VARDIFLEX LED-Strip kann jeweils nach **vierzehn LEDs (55,56 mm)** getrennt werden (Bild 1).

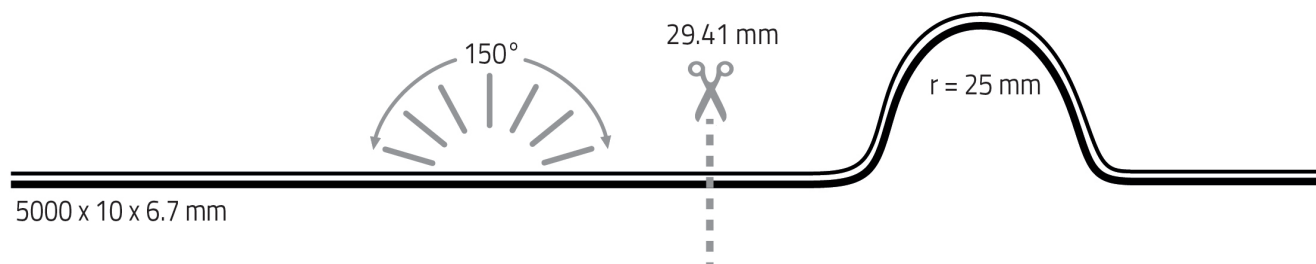


Bild 1

VARDIFLEX LED-Strip an der markierten Stelle trennen.
Bei eng bestückten LED-Strips wird ein Mikroseitenschneider oder optional ein Cutter benötigt!

⚠ Achtung!
Bei Lötverbindungen beachten: Löttemperatur 260° C und Löt-dauer maximal 10 Sekunden.

ELECTROTECHNICAL SAFETY INSTRUCTIONS:

The **VARDIFLEX** LED strip is suitable for in- and outdoor installation and wet rooms.

Risk of electric shock!

Have the installation carried out by a qualified electrician. Any liability claim for **VARDIFLEX** LED strips that have not been installed in accordance with the European safety directives is void.

Caution!

Only connect the **VARDIFLEX** LED strip to a suitable power supply (24 V DC).
Only operate when completely unrolled.
Connect **VARDIFLEX** LED strips in parallel.

 If the yellow „phosphor coating“ surface is damaged, remove the defective segment to prevent eye injury from the blue light of the LED.

SCOPE OF DELIVERY:

1 x 5 meter **VARDIFLEX** LED strip

MARKS AND SYMBOLS:



Compliant with the applicable European CE directives




RoHS mark for products that do not contain heavy metals
(EC Directive 2002/95/EC)



REACH test mark for products whose chemical components are known, registered and authorised



Protection class III



Parallel connection:
Suitable for through-wiring.

IP67

Protected against temporary submersion

TECHNICAL DATA:

Power supply:

24 V power supply with constant output voltage

Power:

75 W

Current strength:

3.125 A

Radiation angle:

150°

Quantity LED:

1190

Length:

maximum 5 meters per connection

Dimensions:

5000 x 10 x 6.7 mm

Bending diameter:

50 mm

Lifespan:

L₇₀ B₅₀: 54.000 h

DISPOSAL:



Dispose of electrical and electronic equipment in an environmentally sound manner. For more information, contact your local authority.

INSTALLATION:

- ⚠ Switch off voltage prior to installation. Ensure that voltage cannot be accidentally switched on again.
- ℹ First connect the **VARDIFLEX** LED strip to an controller, if available, and then to the power supply (not included in the scope of delivery).

⚠ Caution!

On conducting surfaces, place an insulation layer between the **VARDIFLEX** LED strip and surface. Surfaces must be flat, free of dust, grease and dry.

1. Prepare surface.
2. Shorten **VARDIFLEX** LED strip if necessary (fig. 1).
3. Peel off self adhesive film and gently press on **VARDIFLEX** LED strip, do not press directly on the LEDs.
4. Connect **VARDIFLEX** LED strip to power supply.

SHORTENING THE LED STRIP:

⚠ Risk of electric shock!

Always disconnect the mains plug before shortening.

LED strip can be separated in each case after **fourteen (55.56 mm)** (fig. 1).

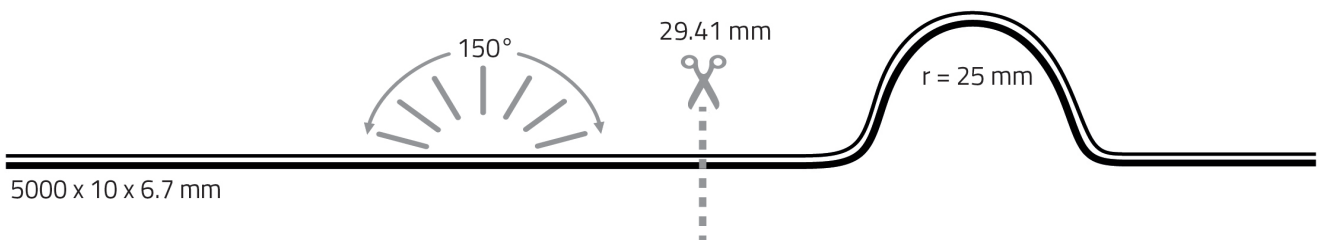


fig. 1

Separate the **VARDIFLEX** LED strip at the marked position. For a tightly assembled LED strip is a micro side cutter or an optional cutter required.

⚠ Caution!

With soldered connections note that the soldering temperature is 260° C and the soldering duration a maximum of 10 seconds per soldering point.

NOTIZEN:
NOTES:

