

SHOWCASE




# SHOWCASE BY RUTEC

This is a breakthrough in small-scale innovation aimed at revolutionizing the lighting methods of store windows, ensuring that displayed items are visible without any obstacles. This sleek yet powerful product boasts excellent lighting performance and effectively enhances the presentation of showcased items.

Equipped with the latest generation of LED light sources, available in 3000 K and 4000 K light colors, this ensures high quality, efficiency, and exceptional color rendition. Its introduction completely transforms the lighting paradigm of display cabinets, allowing for the comprehensive showcasing of all merchandise.

With special optical lenses to enhance light distribution and minimize glare to ensure your perfect illumination experience.

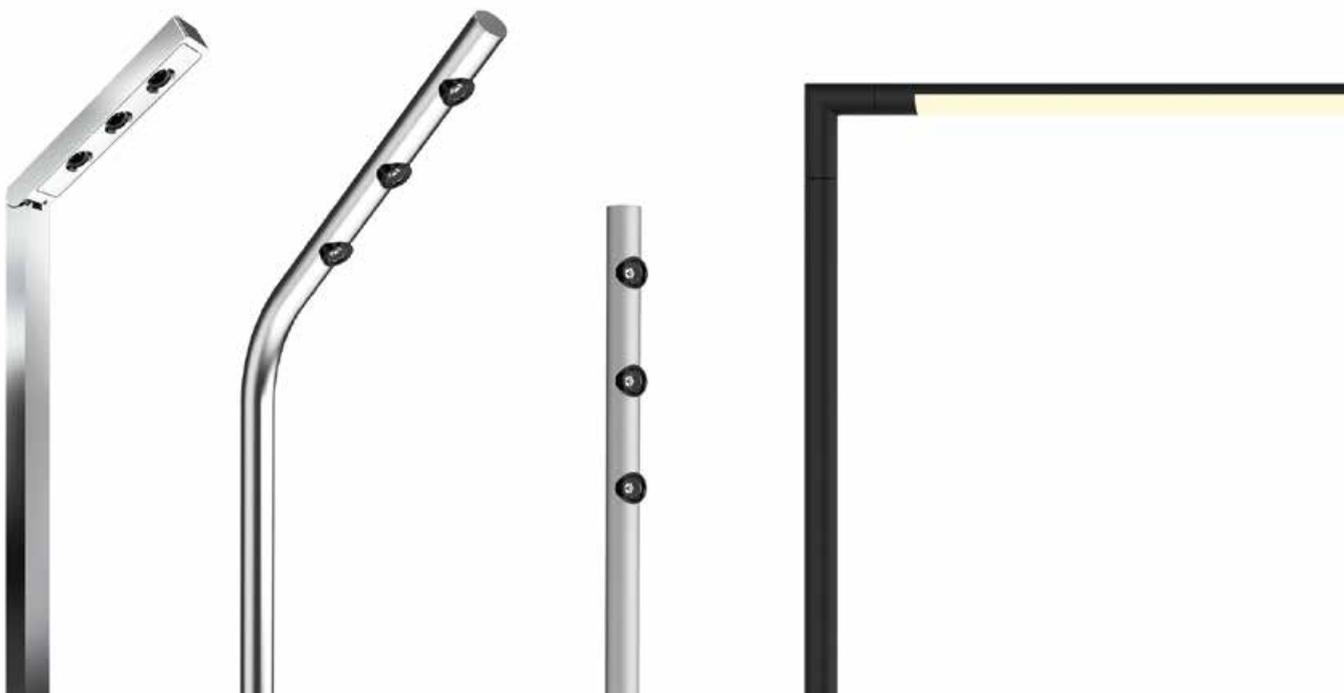



## Variety of styles

This is the perfect choice for displaying your products. Not only does it boast an exquisite appearance, but it also offers powerful functionality to make your product displays more enticing. This lighting fixture comes equipped with two types of bases, thin and thick, catering to different display needs and style preferences. The thin base provides a sleek, minimalist look, perfectly blending with the tabletop.

Furthermore, the thick base offers enhanced stability and elegance, featuring a diamond-patterned design that adds a touch of luxury and sophistication. This series delivers outstanding lighting effects, highlighting the beauty and brilliance of your products.

Whether used for commercial displays or home setups, it allows your products to exude a unique charm, ensuring exceptional display performance and a satisfying user experience.

---

## Height adjustable

Liberal and flexible 360 degree rotation and adjustment in height and base for different applications whenever you require.

Its unique adjustable high feature ensures that you can adjust according to different display needs, allowing each piece of jewelry to receive proper illumination, thus showcasing its beauty and uniqueness.




## Showcase lights-bend



### Colours

9 Haze  4 Chrome  2 Black

Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
 7192X	3W	350 mA	270 lm	228 lm	30° (Lens)	3000K	90+
 7193X	3W	350 mA	270 lm	228 lm	30° (Lens)	3000K	90+

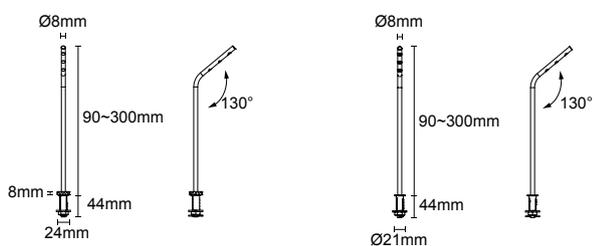

 Cut out : 14mm


## Showcase lights-upright



### Colours

9 Haze  4 Chrome  2 Black

Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
 7194x	3W	350 mA	270 lm	228 lm	30° (Lens)	3000K	90+
 7195x	3W	350 mA	270 lm	228 lm	30° (Lens)	3000K	90+

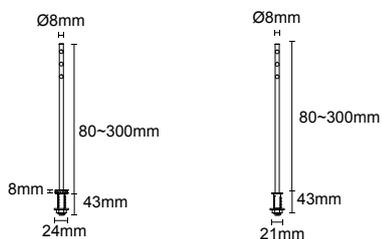

 Cut out : 14mm


# Showcase lights-Adjustable



## Colours

9 Haze  4 Chrome  2 Black

Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
7189x	3W	350 mA	270 lm	-	30° (Lens)	3000K	90+




Cut out : 25mm



## Colours

9 Haze  4 Chrome  2 Black


Article number	LED Consumption	Constant Current	LED Lumen	Beam Angle	CCT	CRI
7183X-XX-XX	2.6W	700 mA	255 lmn	15°/25°/36°/55° (Lens)	3000K 4000K	90+
7184X-XX-XX	2.6W	700 mA	255 lmn	15°/25°/36°/55° (Lens)	3000K 4000K	90+

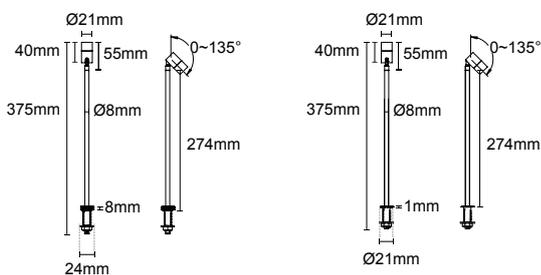

Cut out : 15mm

IP20

# WIRING DIAGRAM

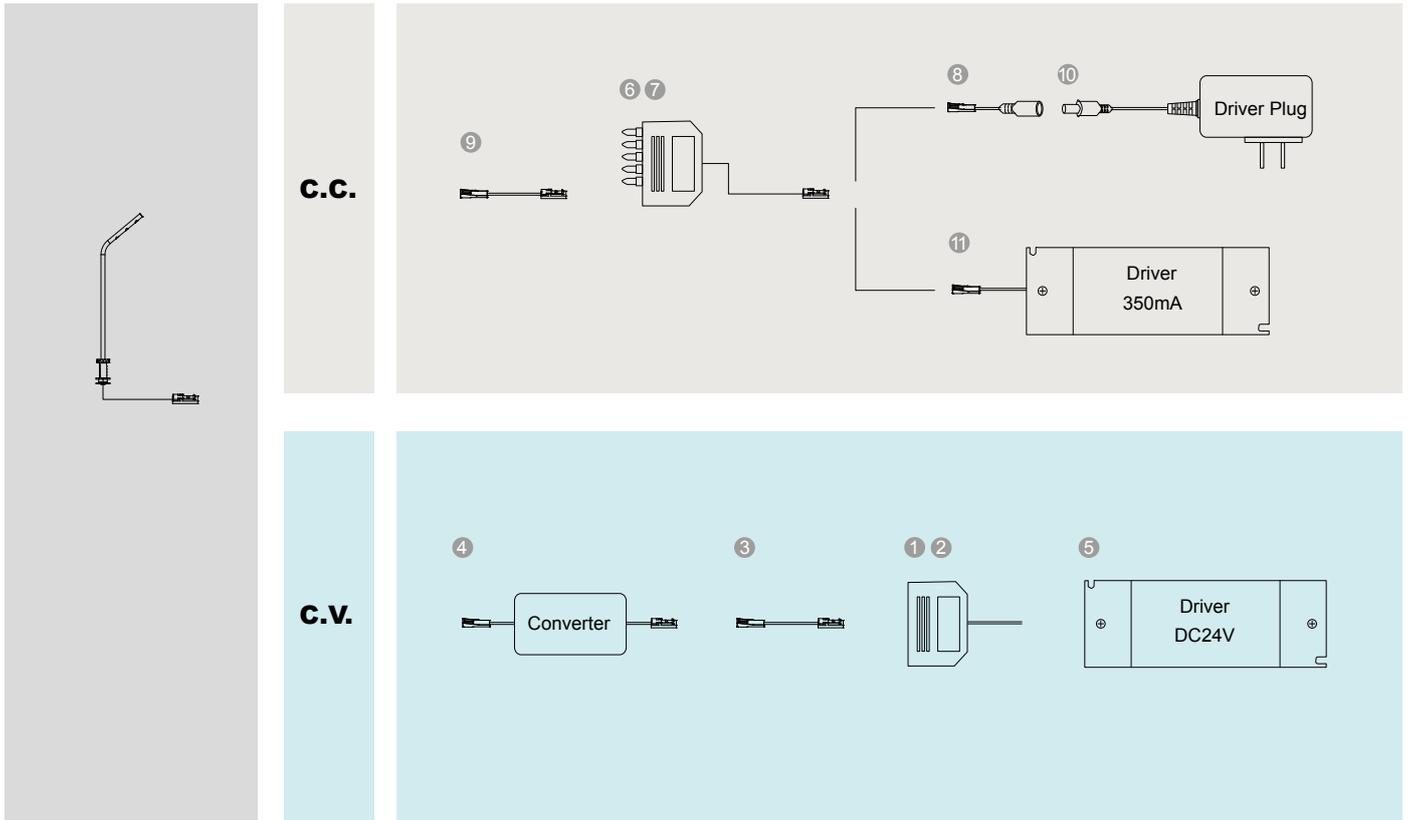

## C.C Accessory (Constant Current)

	<b>59220</b> Type: TOP junction box	6 way series connection cord
	<b>59221</b> Type: TOP junction box	3 way series connection cord Length : 6"(15.24cm)
	<b>59222</b> Type: Driver connection	Driver connection cord Length : 3.94"(10cm)
	<b>59223</b> Type: Connection	Connection cord Length : 36"(91.44cm)
	<b>59228</b> <b>59229</b> Type: Driver Plug	I/P: 100-240V, O/P: 350mA/3-36VDC/max.8w CE/UL/CUL 3W x 1-2 pcs
	<b>59230</b> Type: Driver	I/P: 100-277V, O/P: 350mA/5-40VDC/max.20w CE/ENEC/CCC/CUL 3W x 1-4 pcs

Showcase Cylindrical quick-connect spotlight




Colours

9 Haze  4 Chrome  2 Black

Article number	LED Consumption	Constant Current	LED Lumen	Beam Angle	CCT	CRI
 7185X-XX	1 W	350 mA	125 lm	20° (Lens)	3000K 4000K	90+
 7186X-XX	1 W	350 mA	125 lm	20° (Lens)	3000K 4000K	90+

IP20

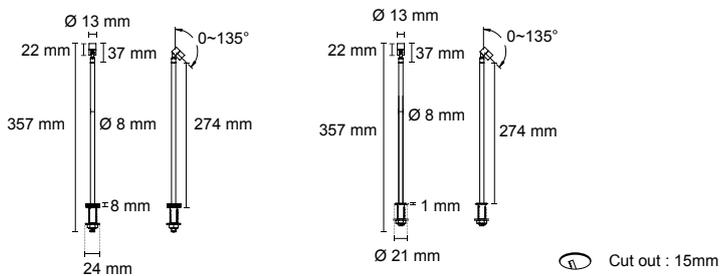


Colours

9 Haze  4 Chrome  2 Black


Article number	LED Consumption	Constant Current	LED Lumen	Beam Angle	CCT	CRI
 7187X-XX	1.7W	500 mA	180 lm	20° (Lens)	3000K 4000K	90+
 7188X-XX	1.7W	500 mA	180 lm	20° (Lens)	3000K 4000K	90+

IP20

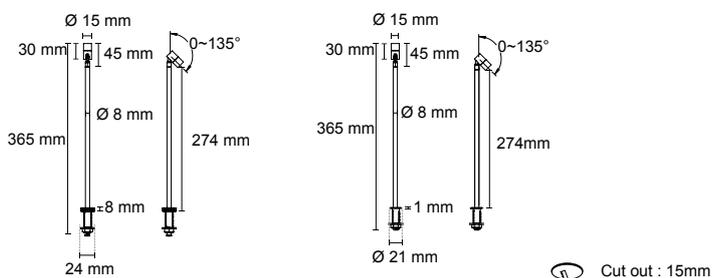

# Goal line

This gate light, supremely lightweight, sleek, and flexible, injects innovation into the world of illumination. With no need for cumbersome installation procedures, it's easy to assemble and convenient to use. Comprising two vertical poles and one horizontal bar, the horizontal bar can rotate 360 degrees, offering a variety of color temperatures to swiftly refresh your space design. No worries, just pure inspiration and overflowing creativity.

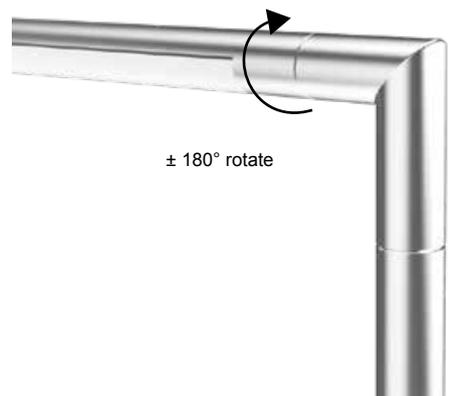


# ► Customize your modular setup

Adapting to various spaces, shapes, and sizes.


## Module options

---


Flood module

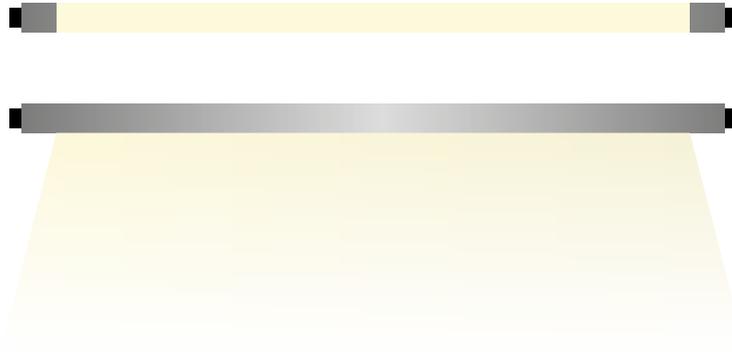



Dot module

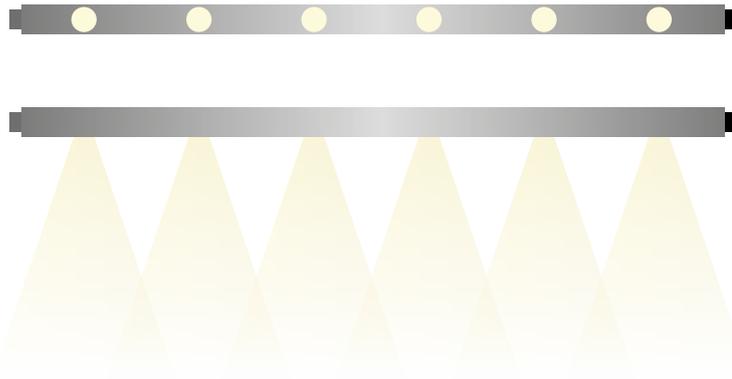

## Configuration options : Showcase Light

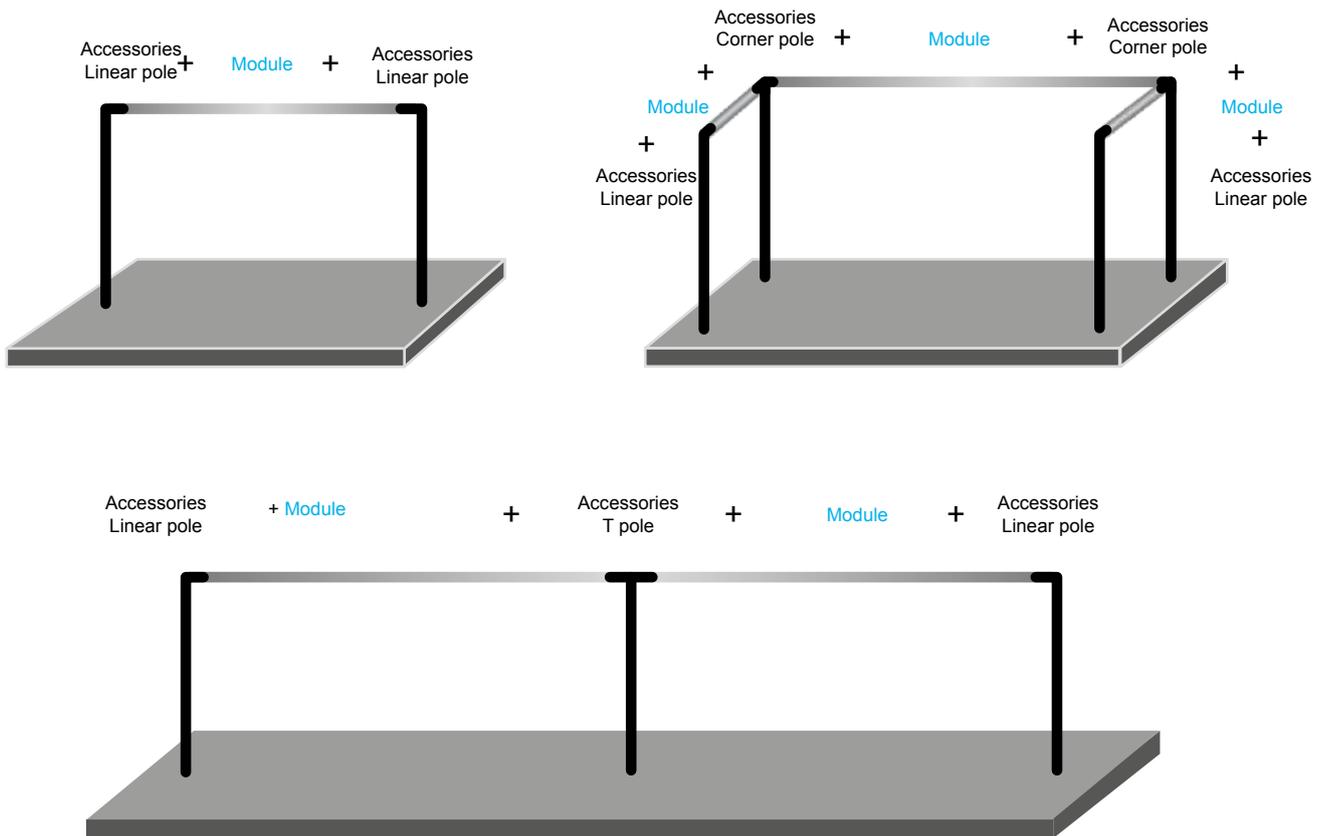


## Configuration options : Linear Light

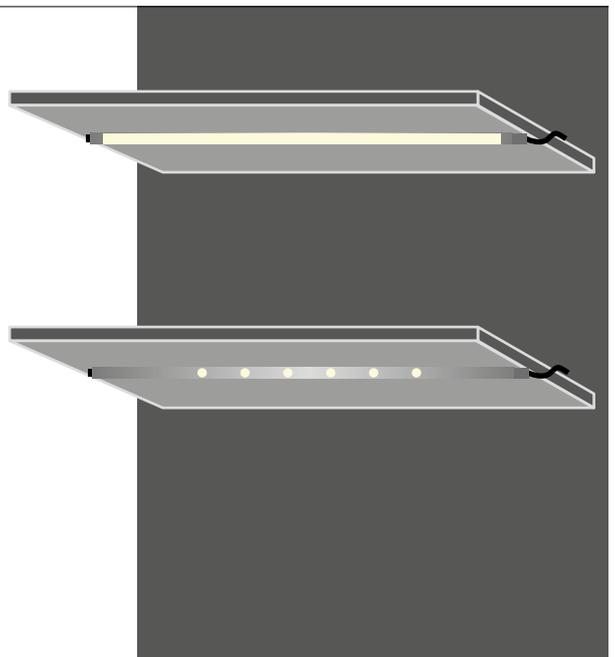





4,8 Watt

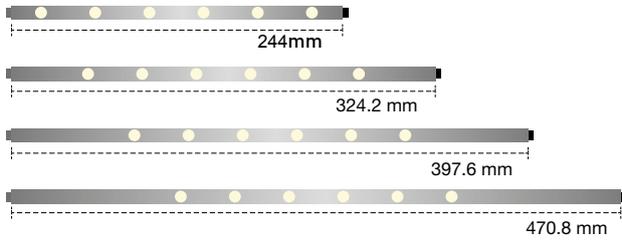

9,6 Watt


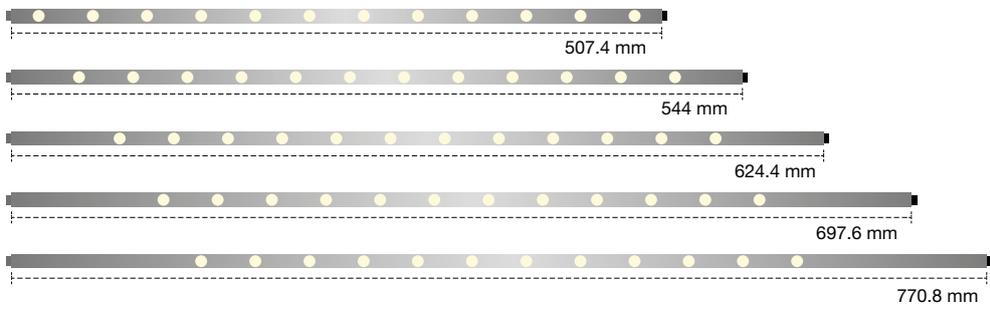



14,4 Watt

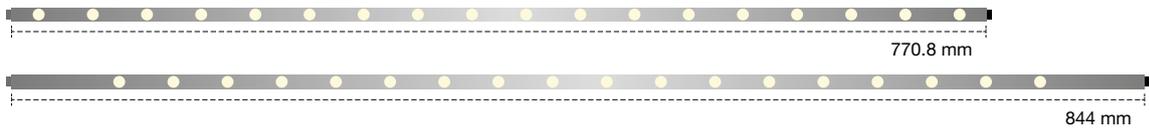


# Showcase Light

The Goal line is a supremely lightweight, sleek, and flexible fixture. It injects innovation into the world of illumination without cumbersome installation procedures. It's easy to assemble and convenient to use two vertical poles and one horizontal bar. The horizontal bar can rotate 360 degrees and offer a variety of color temperatures to swiftly refresh your space design.

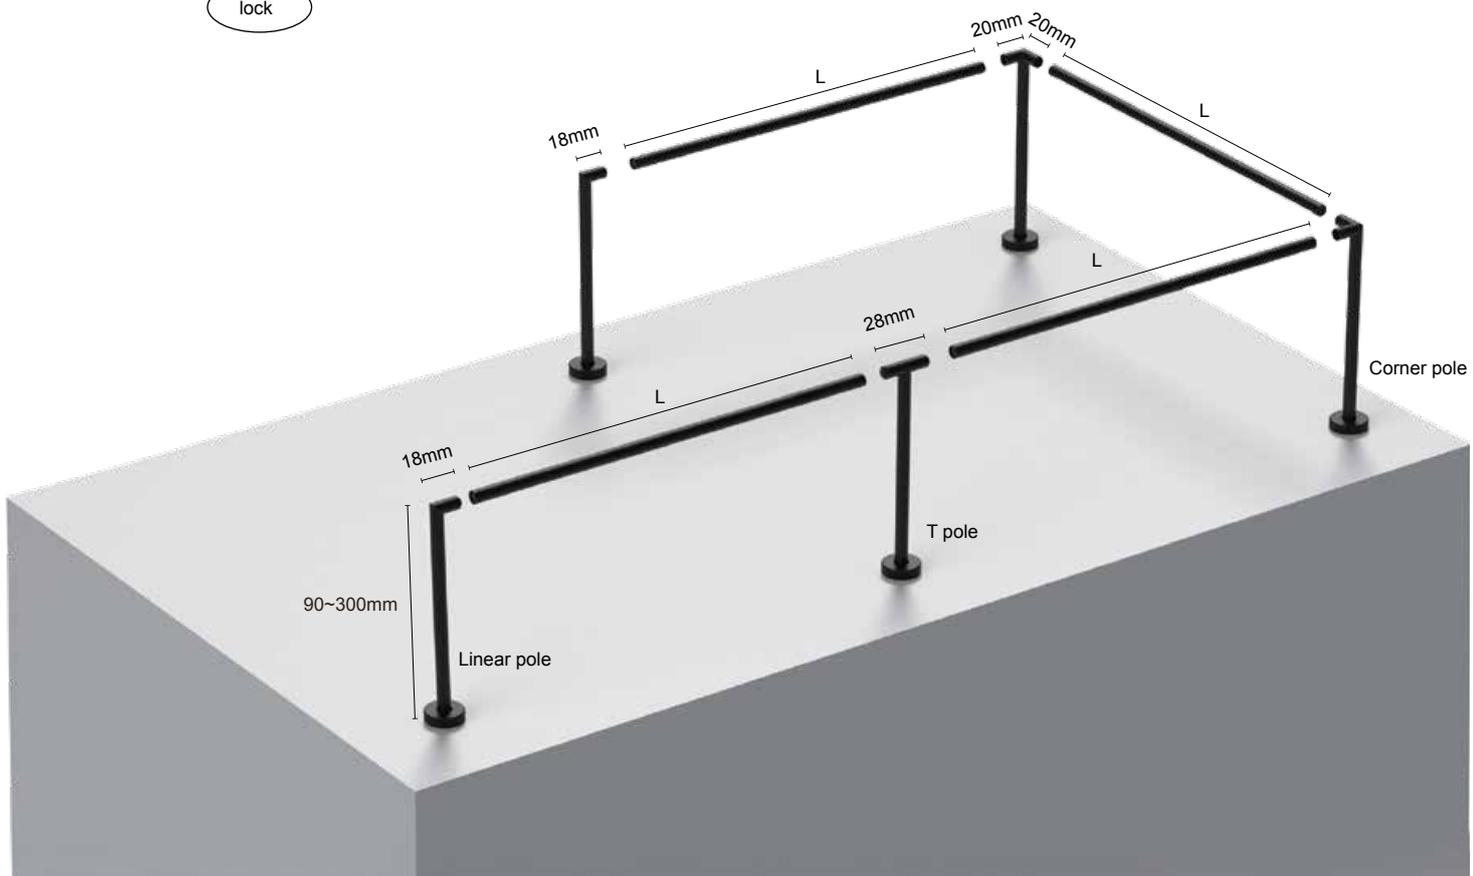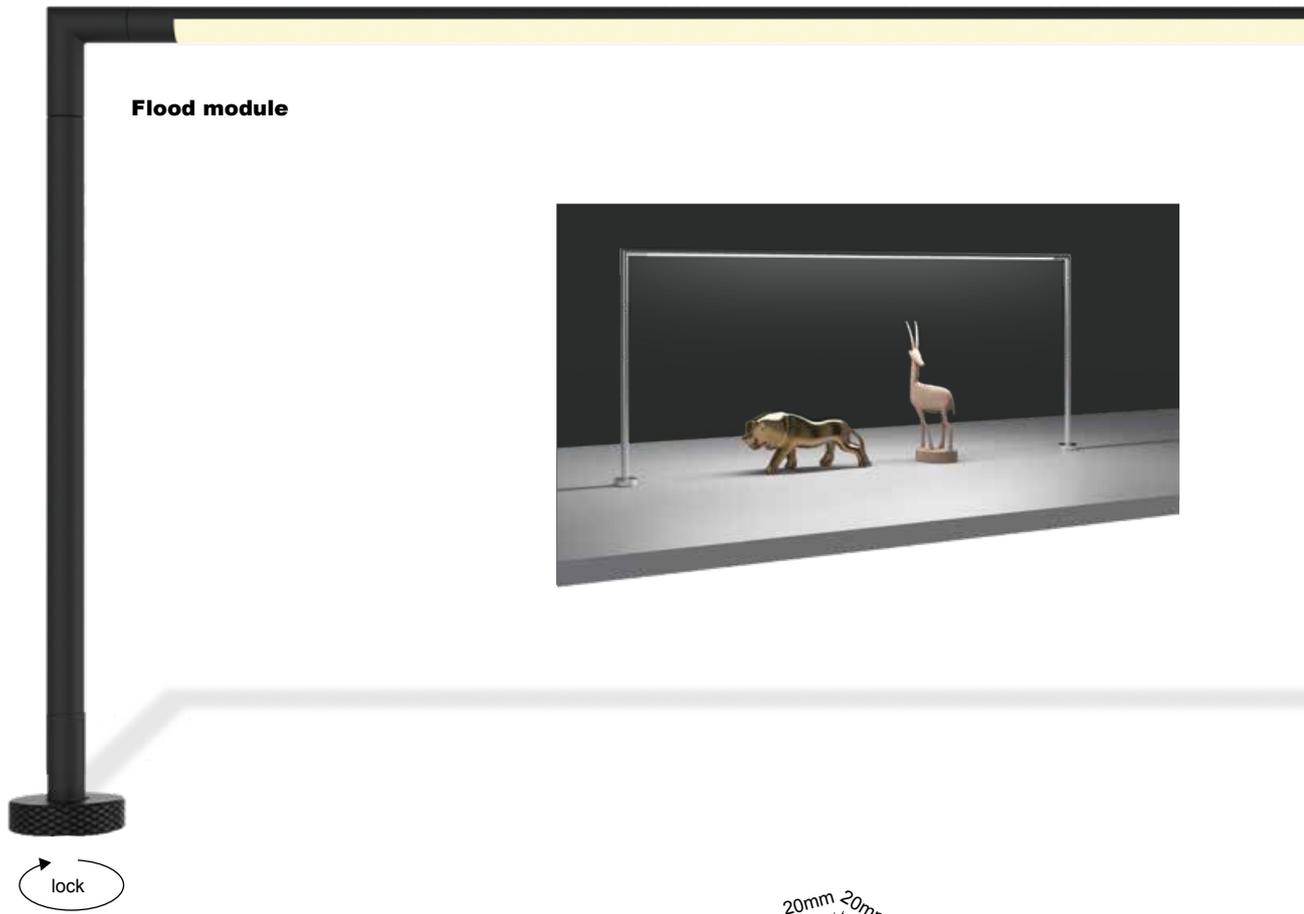

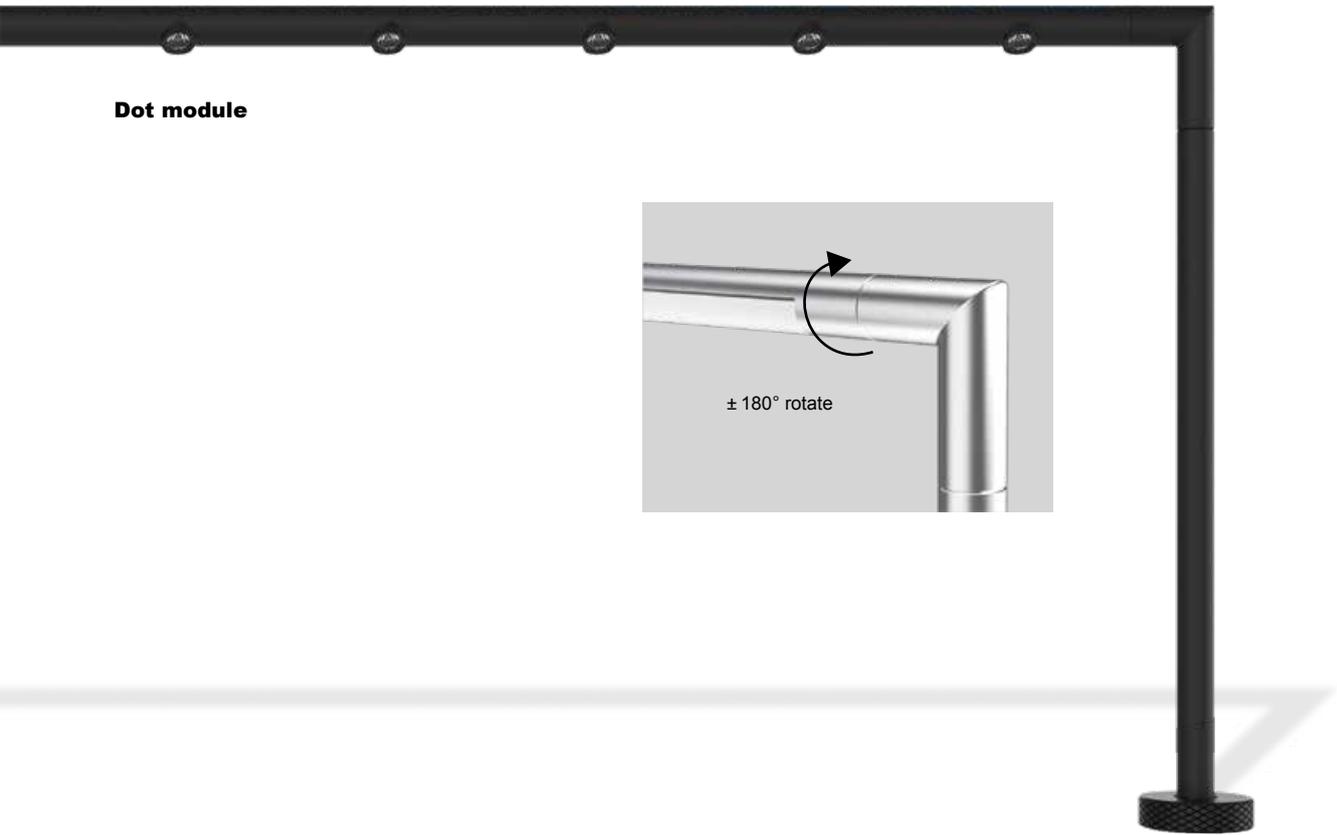


**Dot module**

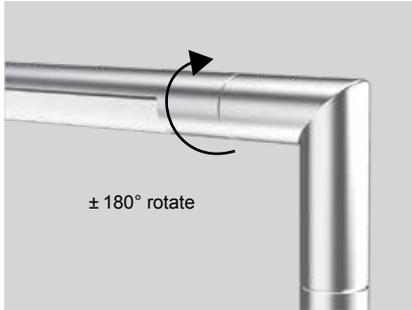


Accessories - Poles


Ⓜ Cut out : 14 mm

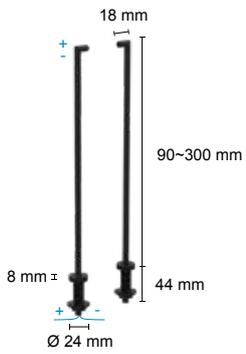

**71990**  
Linear pole

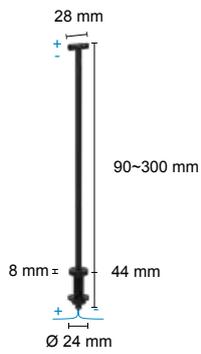

**71991**  
T pole

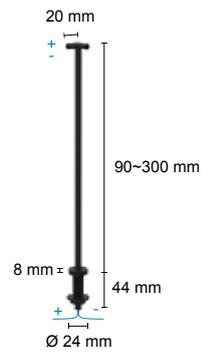

**71990 C**  
Corner pole




# Showcase lights - Goal Line



## Colours

9 Haze  2 Black

Article number	LED Consumption	Constant Voltage	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
7196x	3W	DC24V	351 lm	276 lm	120° (Lens)	3000K	90+
7197x	6W	DC24V	702 lm	547 lm	120° (Lens)	3000K	90+
7198x	9W	DC24V	1053 lm	828 lm	120° (Lens)	3000K	90+

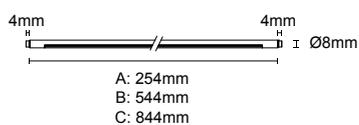

## Driver Accessory



**59231**  
Type: Driver

I/P: 220-240V,  
O/P: 24VDC/max.15w  
CE/TUV/UKCA



**59232**  
Type: Driver

I/P: 120V,  
O/P: 24V/max.12w  
CE/CUL/FCC

## Showcase lights - Goal Line



### Colours

9 Haze  2 Black

Article number	Length (mm)	LED Consumption	Constant Voltage	LED / Delivered Lumen	Beam Angle	CCT	CRI
7196X-061	61	0.5W	DC24V	62 lm / 48 lm	120°	3000K	90+
7196X-098	97.6	1W	DC24V	124 lm / 97 lm	120°	3000K	90+
7196X-134	134.2	1.5W	DC24V	186 lm / 146 lm	120°	3000K	90+
7196X-171	170.8	2W	DC24V	248 lm / 195 lm	120°	3000K	90+
7196X-207	207.4	2.5W	DC24V	311 lm / 244 lm	120°	3000K	90+
7196X-244	244	3W	DC24V	373 lm / 293 lm	120°	3000K	90+
7197X-288	287.8	3.5W	DC24V	435 lm / 342 lm	120°	3000K	90+
7197X-324	324.4	4W	DC24V	497 lm / 391 lm	120°	3000K	90+
7197X-361	361	4.5W	DC24V	560 lm / 440 lm	120°	3000K	90+
7197X-398	397.6	5W	DC24V	622 lm / 489 lm	120°	3000K	90+
7197X-434	434.2	5.5W	DC24V	684 lm / 538 lm	120°	3000K	90+
7197X-471	470.8	6W	DC24V	746 lm / 587 lm	120°	3000K	90+
7197X-507	507.4	6.5W	DC24V	808 lm / 636 lm	120°	3000K	90+
7197X-544	544	7W	DC24V	871 lm / 684 lm	120°	3000K	90+
7198X-588	587.8	7.5W	DC24V	933 lm / 733 lm	120°	3000K	90+
7198X-624	624.4	8W	DC24V	995 lm / 782 lm	120°	3000K	90+
7198X-661	661	8.5W	DC24V	1057 lm / 831 lm	120°	3000K	90+
7198X-698	697.6	9W	DC24V	1120 lm / 880 lm	120°	3000K	90+
7198X-734	734.2	9.5W	DC24V	1182 lm / 929 lm	120°	3000K	90+
7198X-771	770.8	10W	DC24V	1244 lm / 978 lm	120°	3000K	90+
7198X-807	807.4	10.5W	DC24V	1306 lm / 1027 lm	120°	3000K	90+
7198X-844	844	11W	DC24V	1368 lm / 1076 lm	120°	3000K	90+

IP20



# Showcase lights - Goal Dot




## Colours

9 Haze  2 Black

Article number	Length (mm)	LED Consumption	Constant Current	LED/Delivered Lumen	Beam Angle	CCT	CRI
7186X-224	244	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
7186X-325	324.2	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
7186X-398	397.6	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
7186X-471	470.8	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
7187X-508	507.4	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
7187X-544	544	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
7187X-624	624.4	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
7187X-698	697.6	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
7187X-771	770.8	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
7188X-771	770.8	14.4W	750 mA	1458 lm / -- lm	20° (Lens)	3000K	90+
7188X-844	844	14.4W	750 mA	1458 lm / -- lm	20° (Lens)	3000K	90+

IP20




## Showcase lights-Line



### Colours

9 Haze  2 Black

Article number	LED Consumption	Constant Voltage	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
7176x	3W	DC24V	351 lm	276 lm	120° (Lens)	3000K	90+
7177x	6W	DC24V	702 lm	547 lm	120° (Lens)	3000K	90+
7178x	9W	DC24V	1053 lm	828 lm	120° (Lens)	3000K	90+




## Showcase lights-Dot



### Colours

9 Haze  2 Black

Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
7166x	4.8W	250 mA	486 lm	-- lm	30° (Lens)	3000K	90+
7167x	9.6W	500 mA	972 lm	-- lm	30° (Lens)	3000K	90+
7168x	14.4W	750 mA	1458 lm	-- lm	30° (Lens)	3000K	90+



### Dot module

It provides a balanced light effect with no shadow left under it. While simultaneously highlighting the most important subjects, this is the ideal solution for achieving accent lighting. The light cuts emphasize the details you want to bring out.



### Accessories - Power cord




**61999 E**  
Length: 200 cm  
(Included in fixture)



### Accessories - Chips



**61999**  
Clip  
(Included in fixture)



The meticulous cabinet lighting series crafted to offer a distinctive showcase method. It aims to captivate onlookers' attention and highlight the uniqueness of the boutiques in retail stores.

Ultimate performance with clever light shape plays a crucial role in this series. Therefore we developed this range of products specifically for shelves, cabinets, niches, and showcases. The design intends to present excellent performance quality, highlight their rich details, and attract clients' attention.

Whatever the requirements are; the series provides various selections to meet the demands of different tasks. We integrate with the finest illuminate technique to make your boutiques become the eye-catching one.




## Fixed



### Colours

9 Haze  4 Chrome  3 Brass  2 Black

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
ALU5310X-XX	1W	300 mA	84 lm	52 lm	20° (Lens)	2700K 3000K	90+



Cut out : 10.5mm


## Chameleon eyes



### Colours

9 Haze  4 Chrome  3 Brass  2 Black

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
ALU5311X-XX	1 W	300 mA	84 lm	58 lm	20° (Lens)	2700K 3000K	90+



Cut out : 18 mm


# Standard



## Colours

Body: 1 White  2 Black  5 Silver

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
ALU5300X	2 W	700 mA	158 lm	-	250° (Lens)	3000K	90+




Cut out : 35 mm




## Colours

Body: 1 White  2 Black

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
ALU5312X-XX-XX	2 W	700 mA	161 lm	138 lm	18°/33° (Lens)	3000K/2700K	90+



Cut out : 35 mm




# Zoomable




## Colours

Body: 1 White  2 Black

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
ALU5320X	2 W	700 mA	210 lm	112 lm	15°-30°	3000K	90+




 Cut out : 35 mm



# Zoomable

This recessed premium display lighting fixture is your best choice for showcasing premium items. It features a compact size and elegant design, providing unique lighting effects for your premium displays. With its unique function, simply rotating the front ring allows you to effortlessly adjust the beam's illumination area to meet your various display needs.

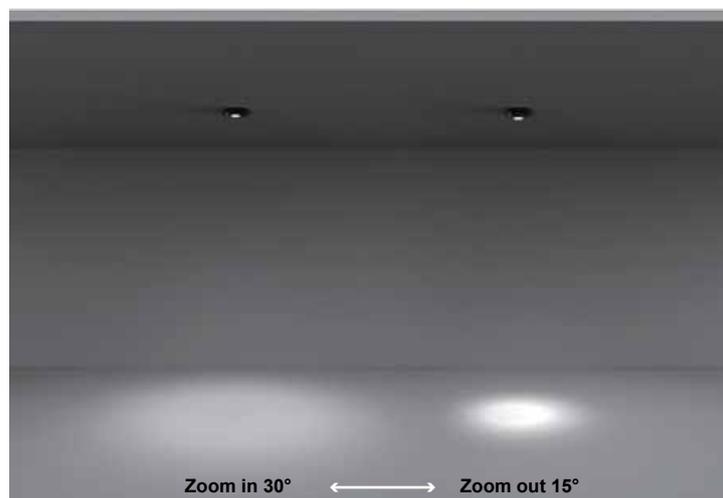



# Showcase lights-Chameleon eyes




## Colours

Body: 1 Black  2 White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
ALU5313X -XX-XX	4 W	350 mA	408 lm	273 lm	15°/36° (Lens)	3000K/2700K	90+



 Cut out : 55 mm

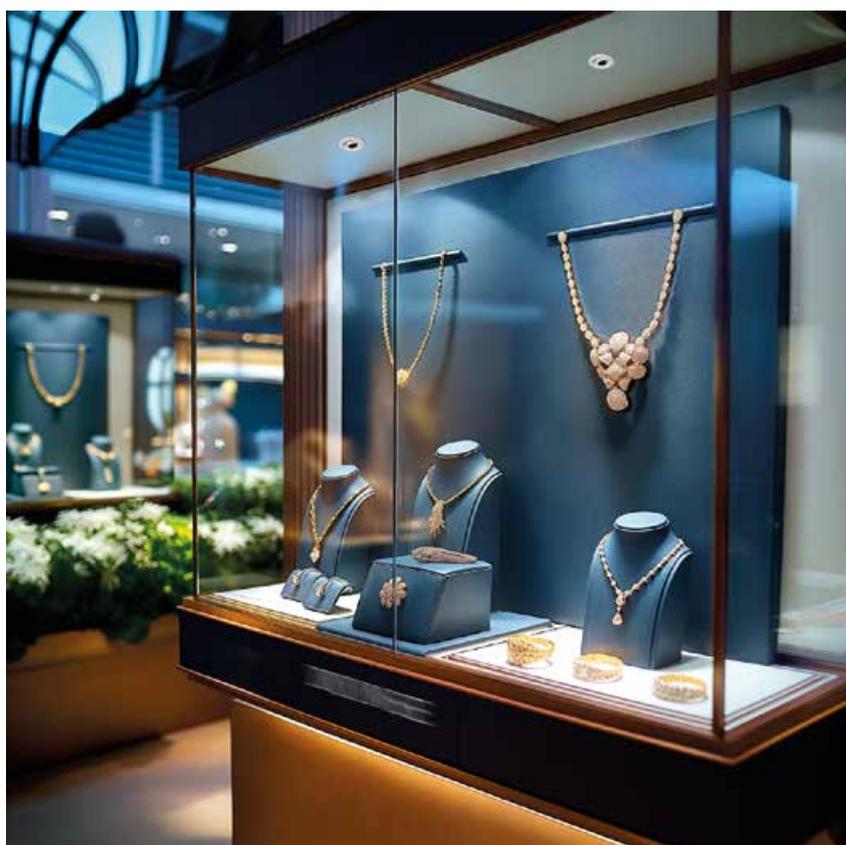





## The most powerful spotlight

This recessed premium display spotlight is designed to showcase the beauty of fine items. Despite its small size, it carries powerful lighting capabilities, adding a touch of brilliance to your display environment. With its 360° rotation and 90° tilt features, it grants you flexible control over lighting, ensuring every detail of your premium items is highlighted.

Moreover, this light fixture is available in two sizes to accommodate different display spaces. It is an ideal choice for both commercial showcases and personal collections. Its exquisite design complements its outstanding lighting performance, bringing elegance and sophistication to your displays. Wherever it is used, this spotlight will provide an extraordinary display experience with its versatility and stylish design.


## Showcase lights-spot



### Colours

Body: 3 Brass ■ 2 Black ■

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
7333X	1W	300 mA	96 lm	82 lm	25°/35°/50° (Lens)	3000K	90+



Cut out : 8mm

### Optional Accessory



S-014  
Snoot


## Showcase lights-spot



### Colours


Body: 3 Brass ■ 2 Black ■

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
7334X	3W	700 mA	210 lm	173 lm	15°/ 27°/32° (Lens)	3000K	90+



Cut out : 8mm

### Optional Accessory



H-003  
Honeycomb louver



DS-004  
Asymmetric Diffusers



DS-005  
Diffusers



# Showcase lights-spot



## Colours

Body : 2 Black ■

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
73320	3W	700 mA	193 lm	38 lm	18°-35° (Lens)	3000K	90+

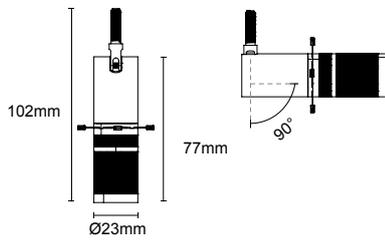

⊕ Cut out : 8mm

## Optional Accessory



7331X  
Color filter



7331X  
please contact with our sales rep for more info



## Showcase lights-spot




### Colours

9 Haze  4 Chrome  2 Black  3 Brass

Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
7335X	1W	350 mA	125 lm	-	20° (Lens)	3000K	90+

IP20



Cut out : 13mm




### Colours

9 Haze  4 Chrome  2 Black  3 Brass

Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
7336X	1.7W	500 mA	180 lm	-	20° (Lens)	3000K	90+

IP20



Cut out : 13mm




Colours

9 Haze  4 Chrome  2 Black  3 Brass

Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
7337X-XX	2.6W	700 mA	255lmn		15°/25°/36° (Lens)	3000K	90+

IP20



Cut out : 13mm



**"Do not hot swap"**

Ensure the power is turned off prior to installation or removal. Operating under live power may result in damage to the luminaire.



## Professional-grade optical lens

A combination of versatility and high-quality multi-layer lenses enhances light transmission and performance.

This optic lens provides high flexibility, balanced efficiency light output, and a precise zooming adjustment.



Circle




Trapezoid



Irregular shape



Square

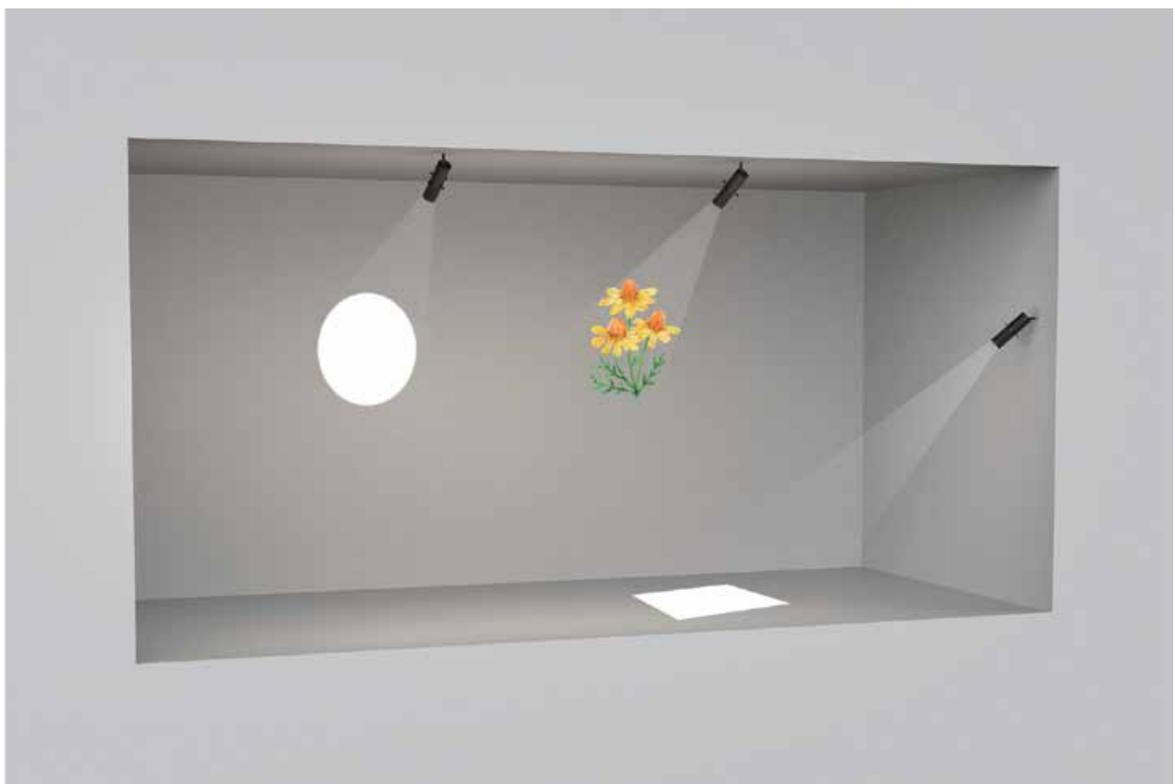

# SHOWCASE TRACK 24V

system





## **Showcase Track 24V**

Innovative design of ultra-micro structure, there are designs for recessed, ceilings, and pendent.

They adopt micro-shaped and exquisite magnetic designs.

Because they are very easy to install.

They can be easily and quickly adjusted according to various professional lighting standards to meet the needs of lighting design.


Suitable for a variety of professional lighting solutions including widely used in luxury chain counter lighting, window lighting, exhibition lighting, hospitality, home lighting, etc.

The ultimate solution




## Showcase Track 24V system

Thanks to the exquisite structure of the 11 mm track design, the series has strong capabilities to fit into stenosis space. Its magnetic adaptor provides a convenient and prompt replacement module. The best solution for the showcase, shelf, niche, etc.

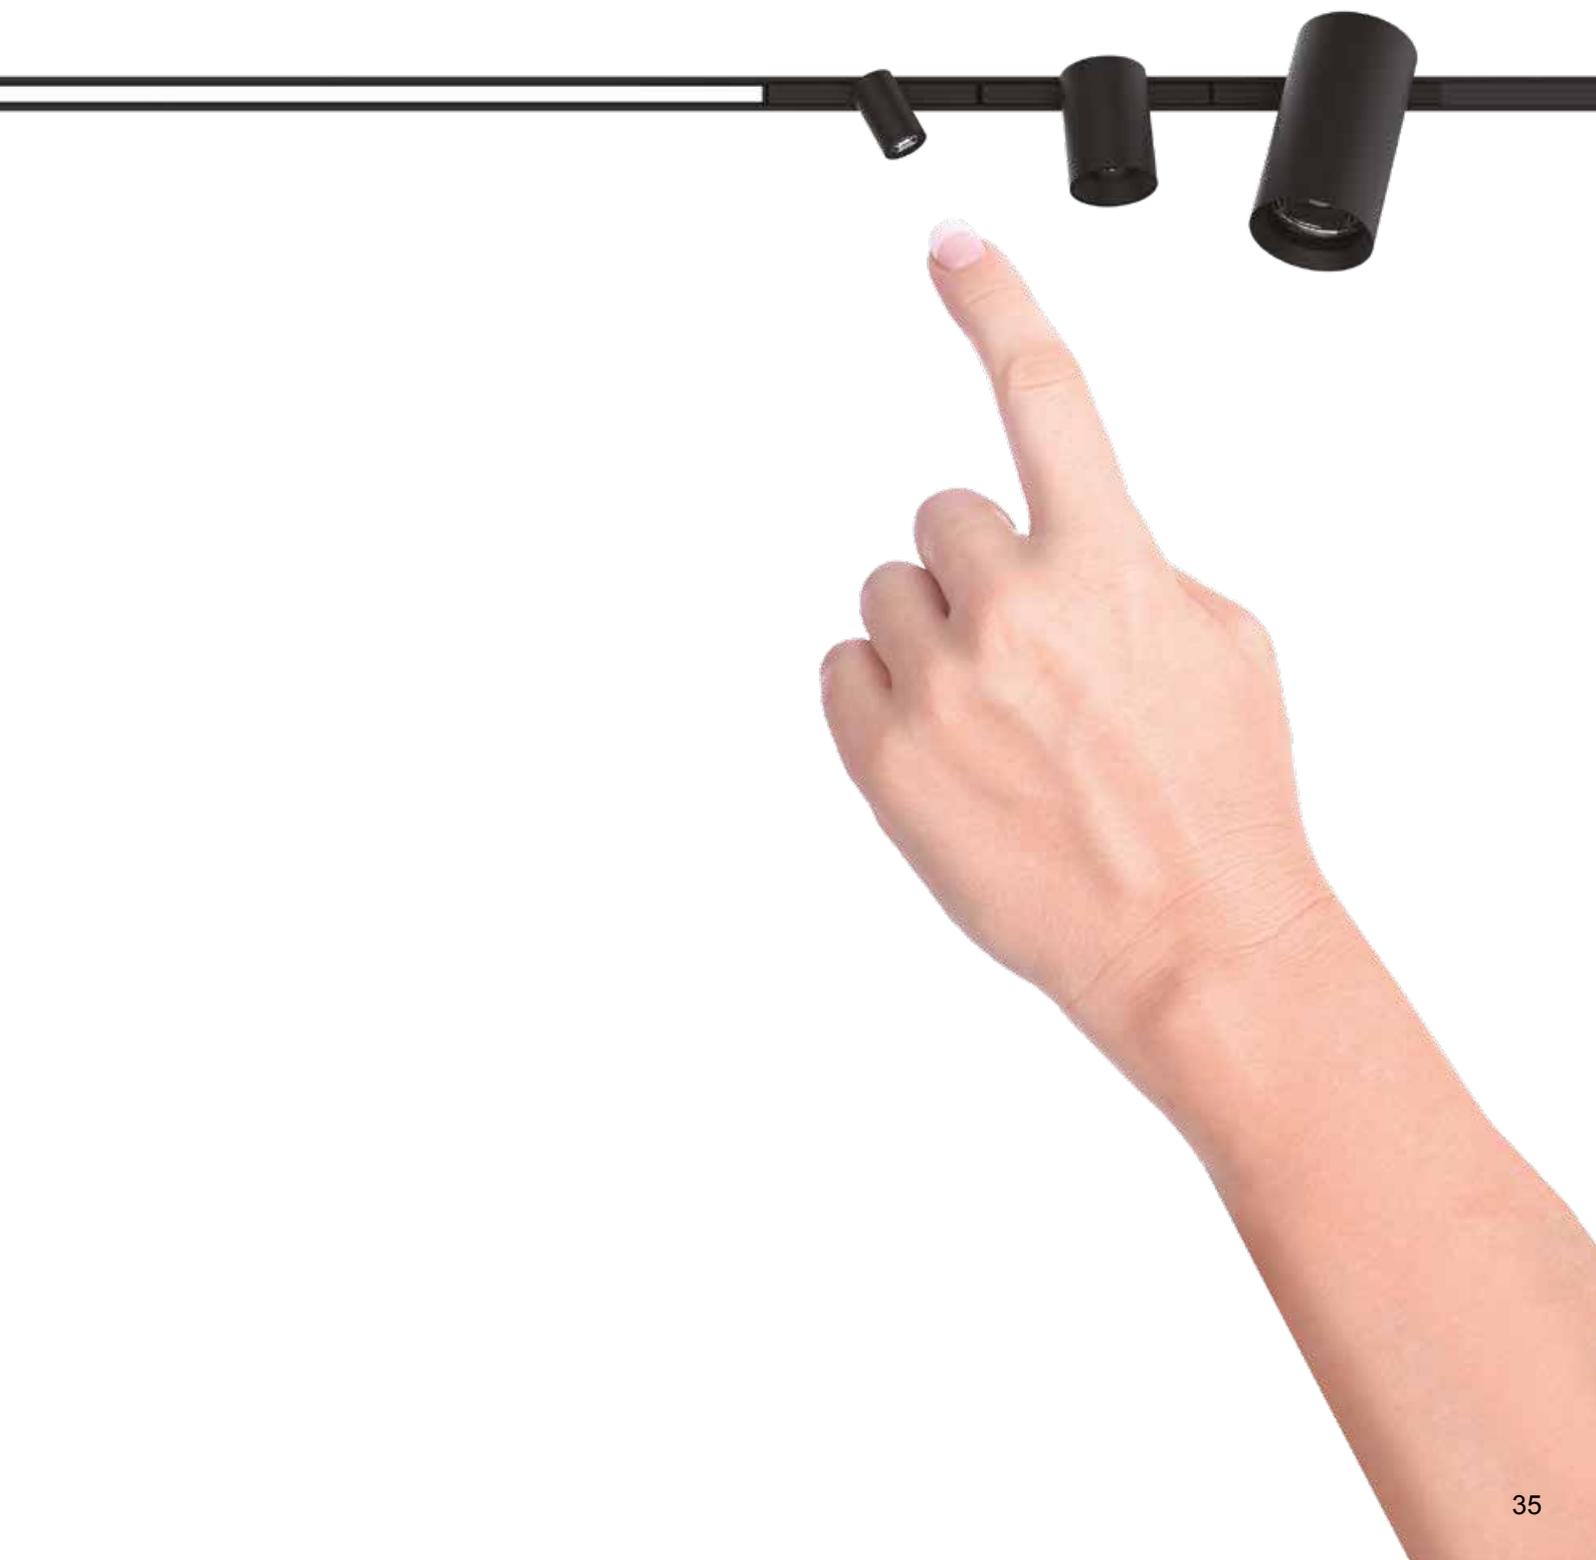

# Showcase Track 24V Display system

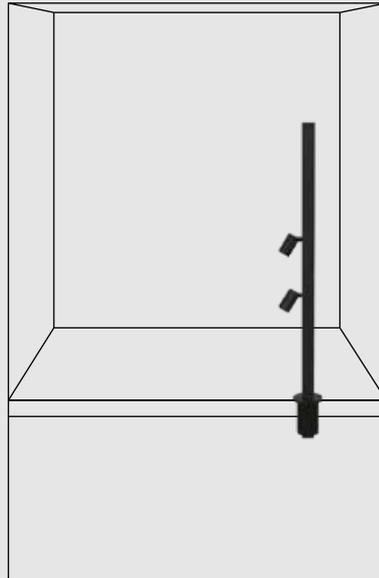

## Quickinfo

### GENERAL

Recessed

### ELECTRICAL

NON DIM

### PHYSICAL

Aluminium

Spray powder

## Description

The ceiling, wall, and shelf aren't the limitations of the series.

The showcase for the shopping mall and museum also can be lit up.

Its ultimate performance lets any product be highlighted by the display system.


The featured product in the store will become an eye-catching point immediately.

Panel



Spot



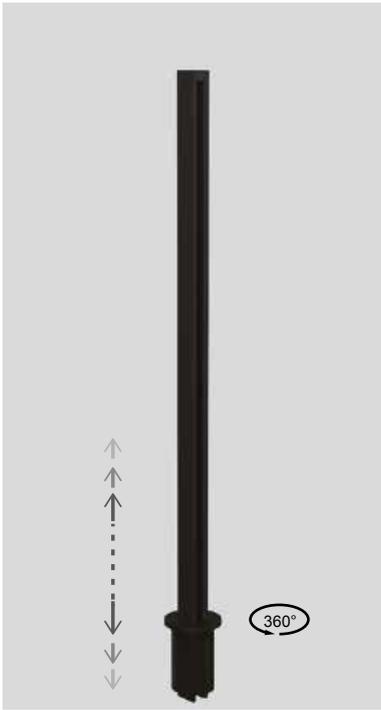


stem track

Colour Black ■

INSTALLATION TRACK

Article number	L (mm)	TYPE
73092	19.69" (500mm)	Stem

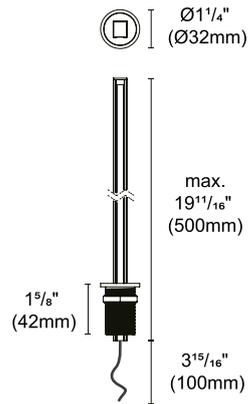



# Showcase Track 24V





## Showcase Track 24V diversity installation

The track for the series has multi-type functions. Such as surface mounted, recessed trimless, pendant, and top-down pendant type. Furthermore, the track has three default lengths, 1 m, 1.5 m, and 2 m, for the choice. What's even more pleasant is the track can be cut on-site. In other words, users can customize the specific length of the track to meet various requirements.



# Showcase Track 24V

## Surface Mounted system



### Quickinfo

#### GENERAL

Surface Mounted

Recessed

#### ELECTRICAL

NON DIM

#### PHYSICAL

Aluminium

Spray powder

Panel



### Description

The incredible 11 mm profile size that characterizes the program enhances the light's flexibility and its relationship with the architecture.


The surface-mounted profile track gives the architectural designer the ability to outline the most distinctive artistic expressions inside the space.

Max wattage linkable per loop for 24V, 96W, class 2 driver. (FOR U.S.)

Max wattage linkable per loop for 24V, 100W. (FOR EU)

Spot





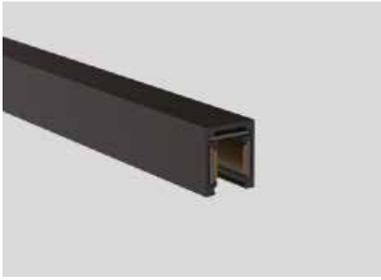


surface mounter track



Colour Black ■

INSTALLATION TRACK

Article number	L (mm)	TYPE
73002	39.37" (1000mm)	Surface Mounted
73012	59.06" (1500mm)	Surface Mounted
73022	78.74" (2000mm)	Surface Mounted

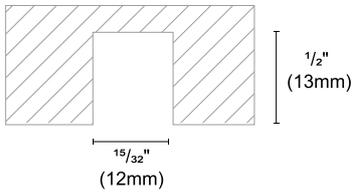

△ Cut out :  $15/32$ " X  $1/2$ " (12X13mm)

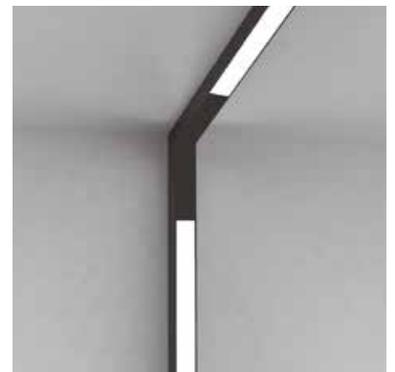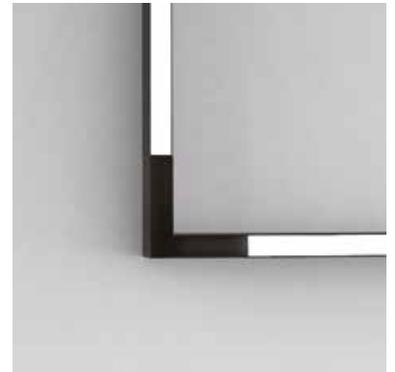





pendant track

Colour Black ■

INSTALLATION TRACK

Article number	L (mm)	TYPE
<b>73062</b>	39.37" (1000mm)	Pendant
<b>73072</b>	59.06" (1500mm)	Pendant
<b>73082</b>	78.74" (2000mm)	Pendant

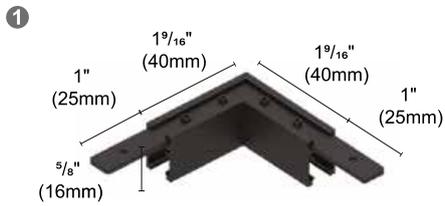

Article number	TYPE
<b>73910</b>	<b>Horizontal corner</b>






CIRCUIT JOINT

	Article number <b>73900</b>	TYPE <b>Horizontal corner L Circuit joint</b>
	Article number <b>73901</b>	TYPE <b>Power joint Length : 78.74" (2000mm)</b>
	Article number <b>73902</b>	TYPE <b>Circuit joint Length : 0.59" (15mm)</b>
	Article number <b>73903</b>	TYPE <b>Circuit joint Length : 11.81" (300mm)</b>
	Article number <b>73904</b>	TYPE <b>I Circuit joint</b>
	Article number <b>73905</b>	TYPE <b>Blank cover Length : 78.74" (2000mm)</b>
	Article number <b>73906</b>	TYPE <b>Vertical corner Right angle seat</b>
	Article number <b>73907</b>	TYPE <b>End cap</b>

\* Tail cap has break-off holes for self-trimming.



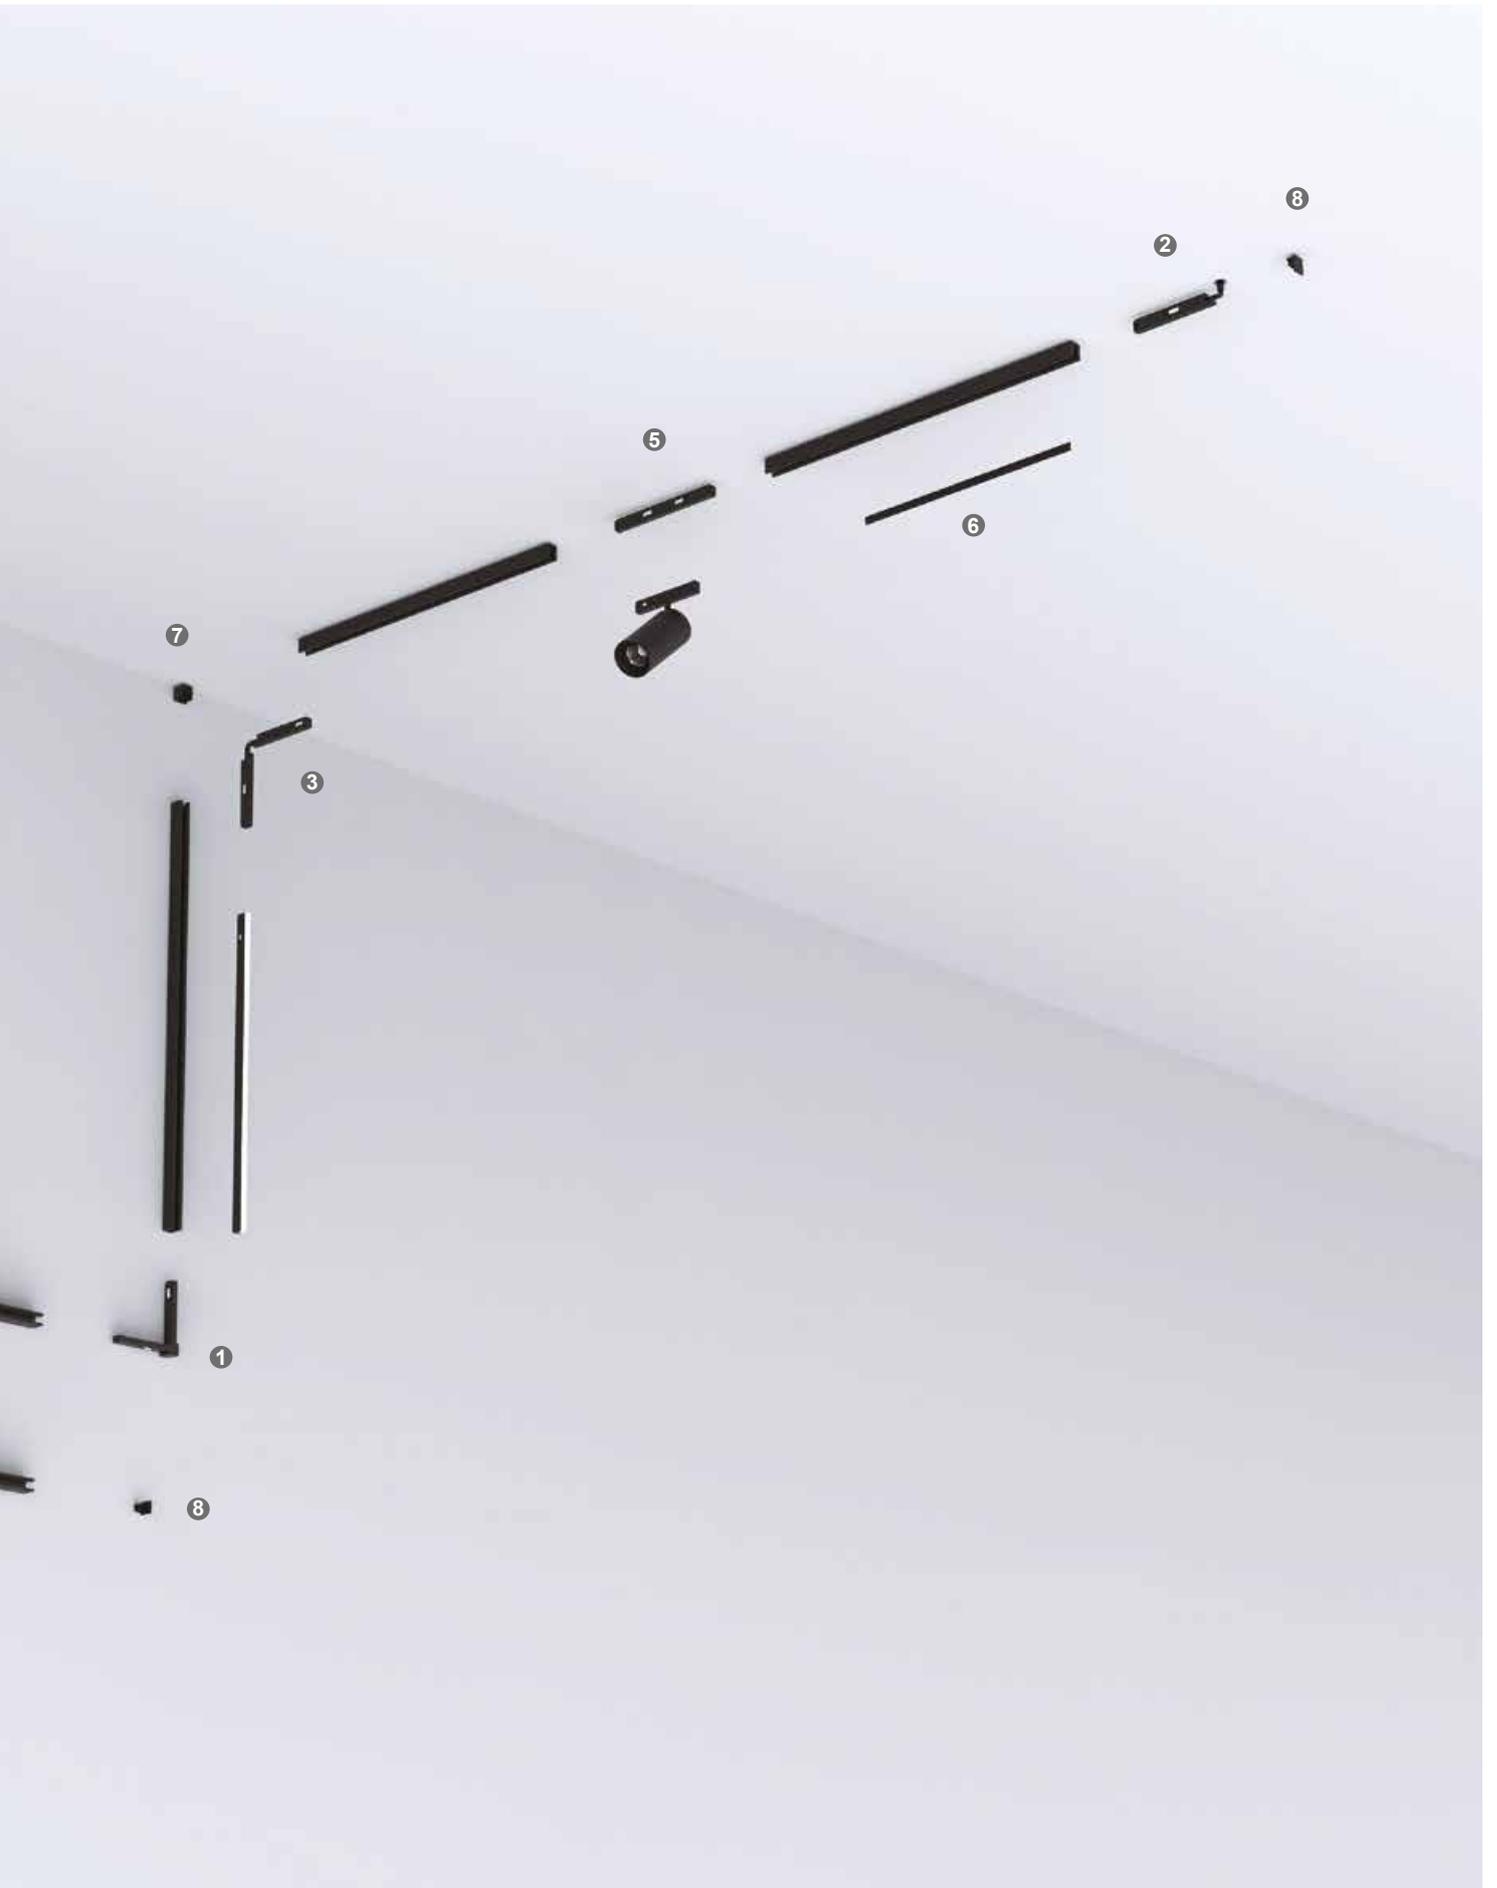


# LONGINES



# Showcase Track 24V

## Pendant system

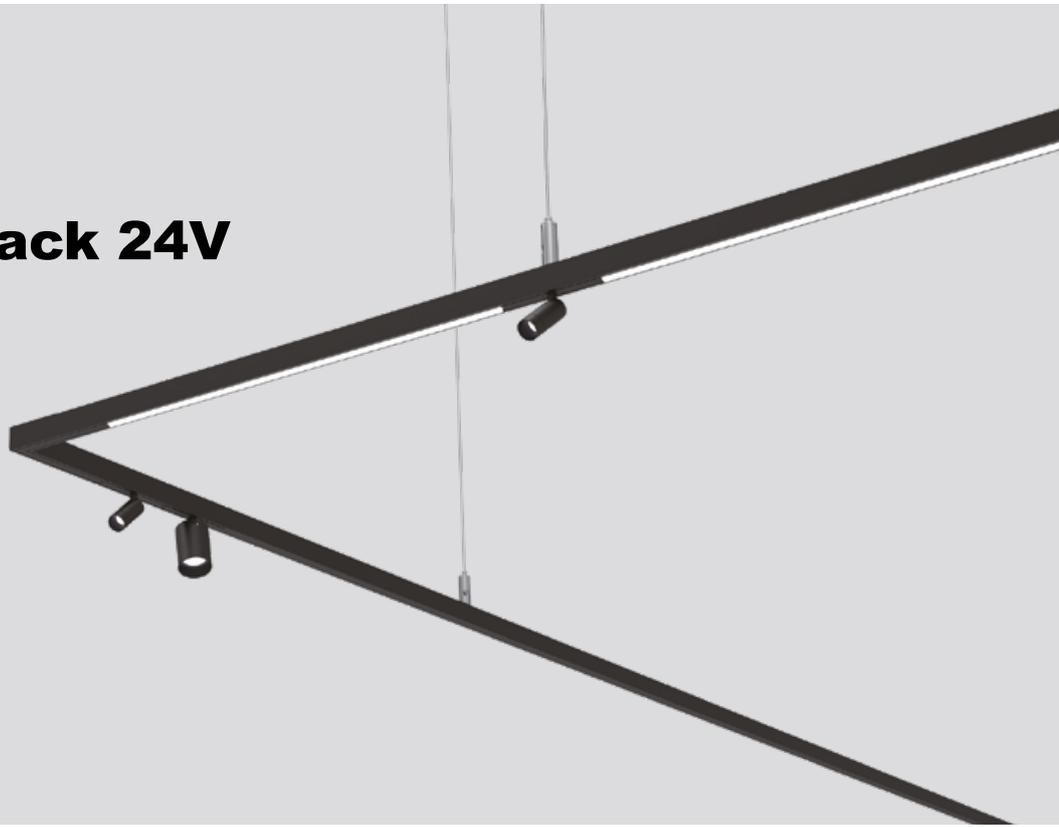

### Quickinfo

#### GENERAL

Pendant

#### ELECTRICAL

NON DIM

#### PHYSICAL

Aluminium

Spray powder

### Description

Imagine creating a 3 dimension artificial works of art floating above in the space. This pendant system provides the possibility of creativity for the users and designers.

It gets rid of the shackles of the surface, allows endless imagination and creativity to emanate from each idea endlessly.

Max wattage linkable per loop for 24V, 96W, class 2 driver. (FOR U.S.)

Max wattage linkable per loop for 24V, 100W. (FOR EU)

Panel



Spot



CIRCUIT JOINT



Article number	TYPE
73901	<b>Power joint</b> Length : 78.74" (2000mm)



Article number	TYPE
73902	<b>Circuit joint</b> Length : 0.59" (15mm)



Article number	TYPE
73904	<b>I Circuit joint</b>



Article number	TYPE
73905	<b>Blank cover</b> Length : 78.74" (2000mm)



Article number	TYPE
73908	<b>End cap</b>




Article number	TYPE
73909	<b>Reinforced joint</b>


CEILING FASTENER / CABLE SUSPENSION




Article number	TYPE
73920	<b>Pendant Kit</b>



Article number	TYPE
73921	<b>Pendant Kit for power connection without power cord (FOR EU)</b>




Article number	TYPE
73922	<b>Pendant Kit for power connection without power cord (FOR U.S.)</b>

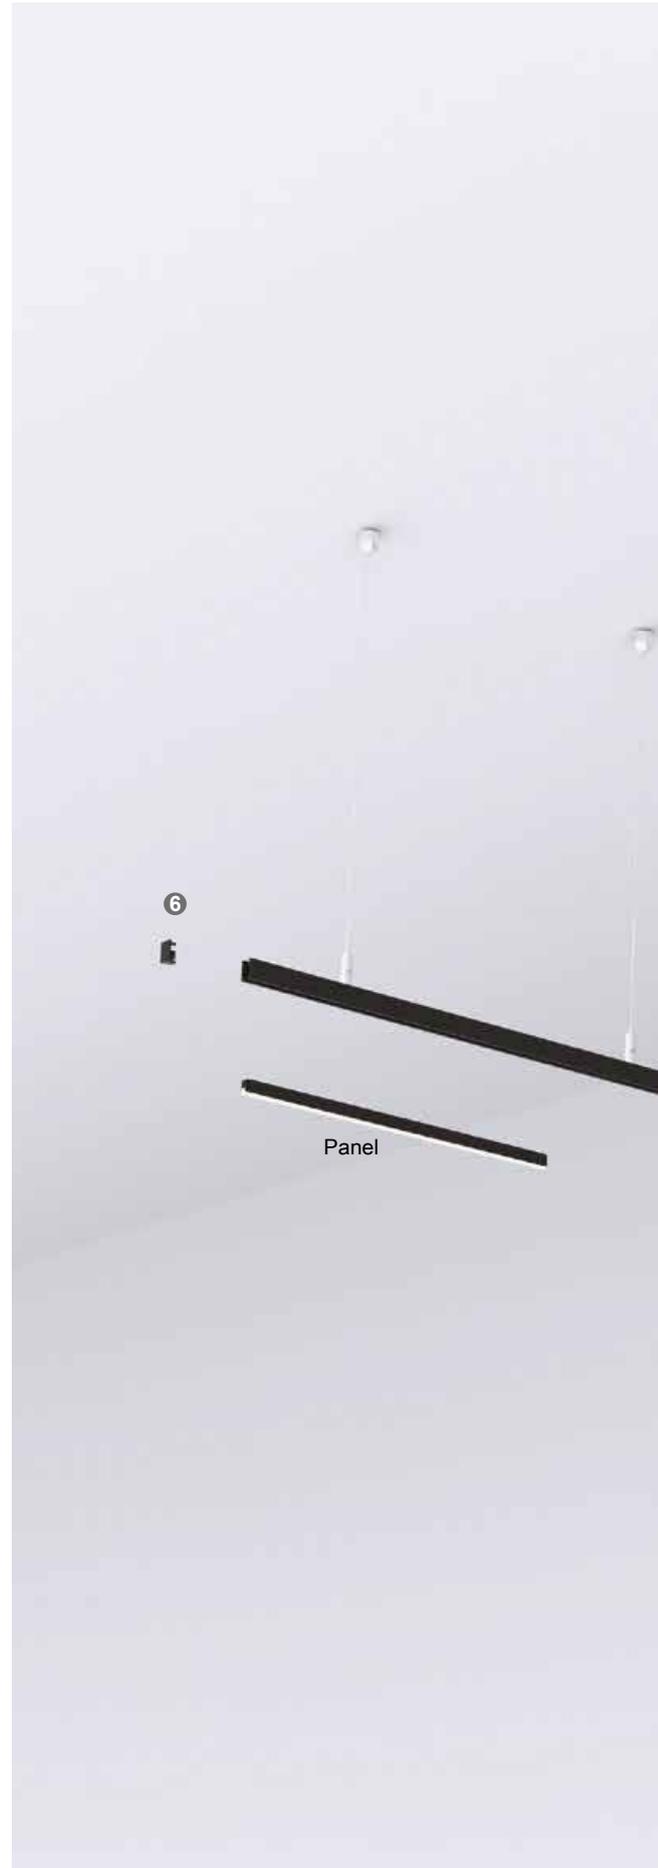



# Showcase Track 24V

## Recessed Trimless system

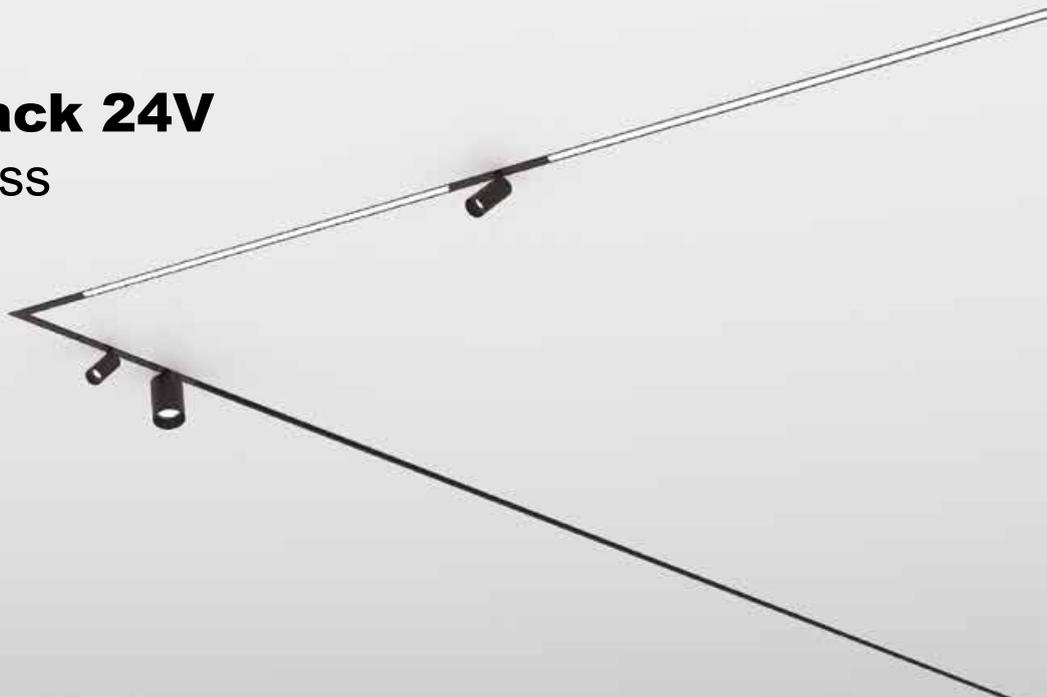

### Quickinfo

#### GENERAL

Recessed Trimless

#### ELECTRICAL

NON DIM

#### PHYSICAL

Aluminium

Spray powder

### Description

Surprising to the 5.8mm width of the track's inner length.

The recessed trimless track creates an extremely neat surface wherever it is installed.

Combining with the horizontal and vertical corner profiles,

this system significantly reduces the sensitivity of oppressive in the boutique area.

Exquisite, elegant, luxurious, and grandeur are its deputation.

Max wattage linkable per loop for 24V, 96W, class 2 driver. (FOR U.S.)


Max wattage linkable per loop for 24V, 100W. (FOR EU)

Panel



Spot




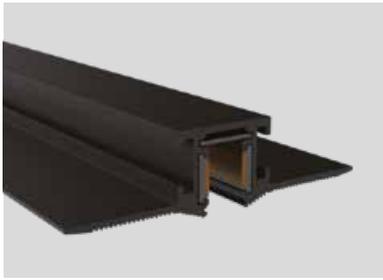


recessed trimless track


Colour Black ■

INSTALLATION TRACK



Article number	L (mm)	TYPE
<b>73032</b>	39.37" (1000mm)	Recessed Trimless
<b>73042</b>	59.06" (1500mm)	Recessed Trimless
<b>73052</b>	78.74" (2000mm)	Recessed Trimless

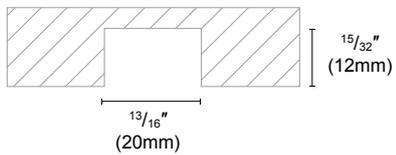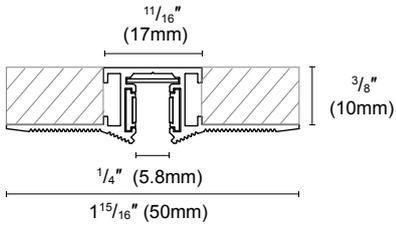


▲ Cut out : 13/16" X 15/32" (20X12mm)

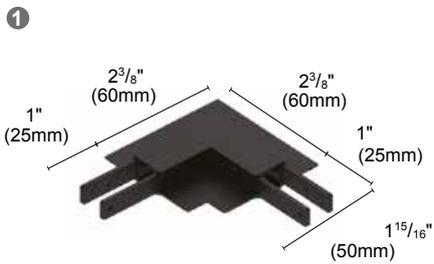

Article number	TYPE
<b>73911</b>	<b>Trimless recessed horizontal corner</b>

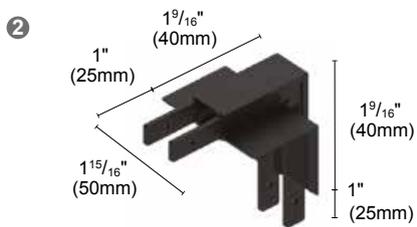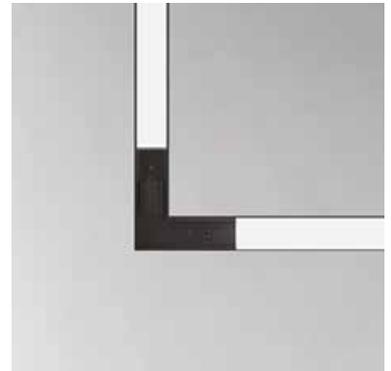

Article number	TYPE
<b>73912</b>	<b>Trimless recessed vertical corner</b>

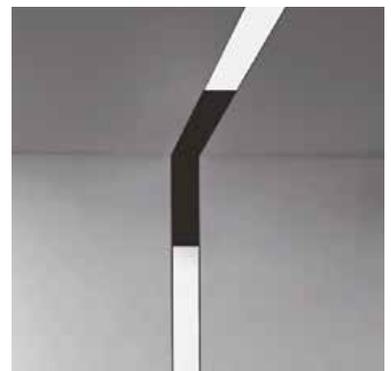



CIRCUIT JOINT

Article number	TYPE
73901	Power joint (For EU)
73901US	Power joint (For AM) Length : 78.74" (2000mm)



Article number	TYPE
73902	Circuit joint Length : 0.59" (15mm)



Article number	TYPE
73904	I Circuit joint



Article number	TYPE
73905	Blank cover Length : 78.74" (2000mm)



Article number	TYPE
73906	End cap



Article number	TYPE
73930	Reinforced joint (2 Pieces)







## Quickinfo

### GENERAL

Pendant

### ELECTRICAL

NON DIM

### PHYSICAL

Aluminium

Spray powder

## Description

Want to create an eye-catching work of art?

The Showcase Track up-down pendant system is your choice.

According to the two directions of the luminous surface, up-down pendant system gives a diverse performance in 3 dimensions.

Lights aren't just for decoration and illuminated anymore.

It becomes an eye-catching work of art for intellectual, emotional, and rational.

Max wattage linkable per loop for 24V, 96W, class 2 driver. (FOR U.S.)

Max wattage linkable per loop for 24V, 100W. (FOR EU)

Panel



Spot







pendant track up and down

Colour Black ■

INSTALLATION TRACK

Article number	L (mm)	TYPE
73102	39.37" (1000mm)	Up-down Pendant
73112	59.06" (1500mm)	Up-down Pendant
73122	78.74" (2000mm)	Up-down Pendant

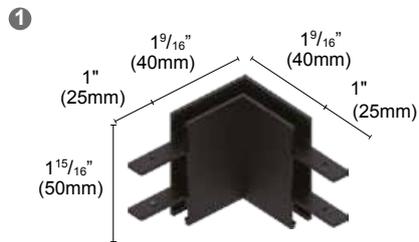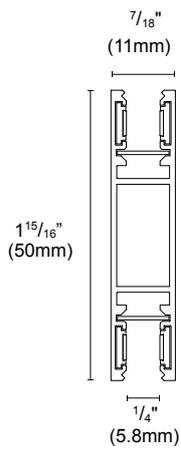

Article number	TYPE
73913	Horizontal corner





CIRCUIT JOINT

	<table border="1"> <thead> <tr> <th>Article number</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>73901</td> <td>Power joint Length : 78.74" (2000mm)</td> </tr> </tbody> </table>	Article number	TYPE	73901	Power joint Length : 78.74" (2000mm)
Article number	TYPE				
73901	Power joint Length : 78.74" (2000mm)				
	<table border="1"> <thead> <tr> <th>Article number</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>73902</td> <td>Circuit joint Length : 0.59" (15mm)</td> </tr> </tbody> </table>	Article number	TYPE	73902	Circuit joint Length : 0.59" (15mm)
Article number	TYPE				
73902	Circuit joint Length : 0.59" (15mm)				
	<table border="1"> <thead> <tr> <th>Article number</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>73926</td> <td>Circuit joint Length : 2.76" (70mm)</td> </tr> </tbody> </table>	Article number	TYPE	73926	Circuit joint Length : 2.76" (70mm)
Article number	TYPE				
73926	Circuit joint Length : 2.76" (70mm)				
	<table border="1"> <thead> <tr> <th>Article number</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>73904</td> <td>I Circuit joint</td> </tr> </tbody> </table>	Article number	TYPE	73904	I Circuit joint
Article number	TYPE				
73904	I Circuit joint				
	<table border="1"> <thead> <tr> <th>Article number</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>73905</td> <td>Blank cover Length : 78.74" (2000mm)</td> </tr> </tbody> </table>	Article number	TYPE	73905	Blank cover Length : 78.74" (2000mm)
Article number	TYPE				
73905	Blank cover Length : 78.74" (2000mm)				
	<table border="1"> <thead> <tr> <th>Article number</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>73927</td> <td>End cap</td> </tr> </tbody> </table>	Article number	TYPE	73927	End cap
Article number	TYPE				
73927	End cap				
	<table border="1"> <thead> <tr> <th>Article number</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>73930</td> <td>Reinforced joint (2 Pieces)</td> </tr> </tbody> </table>	Article number	TYPE	73930	Reinforced joint (2 Pieces)
Article number	TYPE				
73930	Reinforced joint (2 Pieces)				

CEILING FASTENER / CABLE SUSPENSION

	<table border="1"> <thead> <tr> <th>Article number</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>73923</td> <td>Pendant Kit</td> </tr> </tbody> </table>	Article number	TYPE	73923	Pendant Kit
Article number	TYPE				
73923	Pendant Kit				
	<table border="1"> <thead> <tr> <th>Article number</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>73924</td> <td>Pendant Kit for power connection without power cord (FOR EU)</td> </tr> </tbody> </table>	Article number	TYPE	73924	Pendant Kit for power connection without power cord (FOR EU)
Article number	TYPE				
73924	Pendant Kit for power connection without power cord (FOR EU)				
	<table border="1"> <thead> <tr> <th>Article number</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>73925</td> <td>Pendant Kit for power connection without power cord (FOR U.S.)</td> </tr> </tbody> </table>	Article number	TYPE	73925	Pendant Kit for power connection without power cord (FOR U.S.)
Article number	TYPE				
73925	Pendant Kit for power connection without power cord (FOR U.S.)				


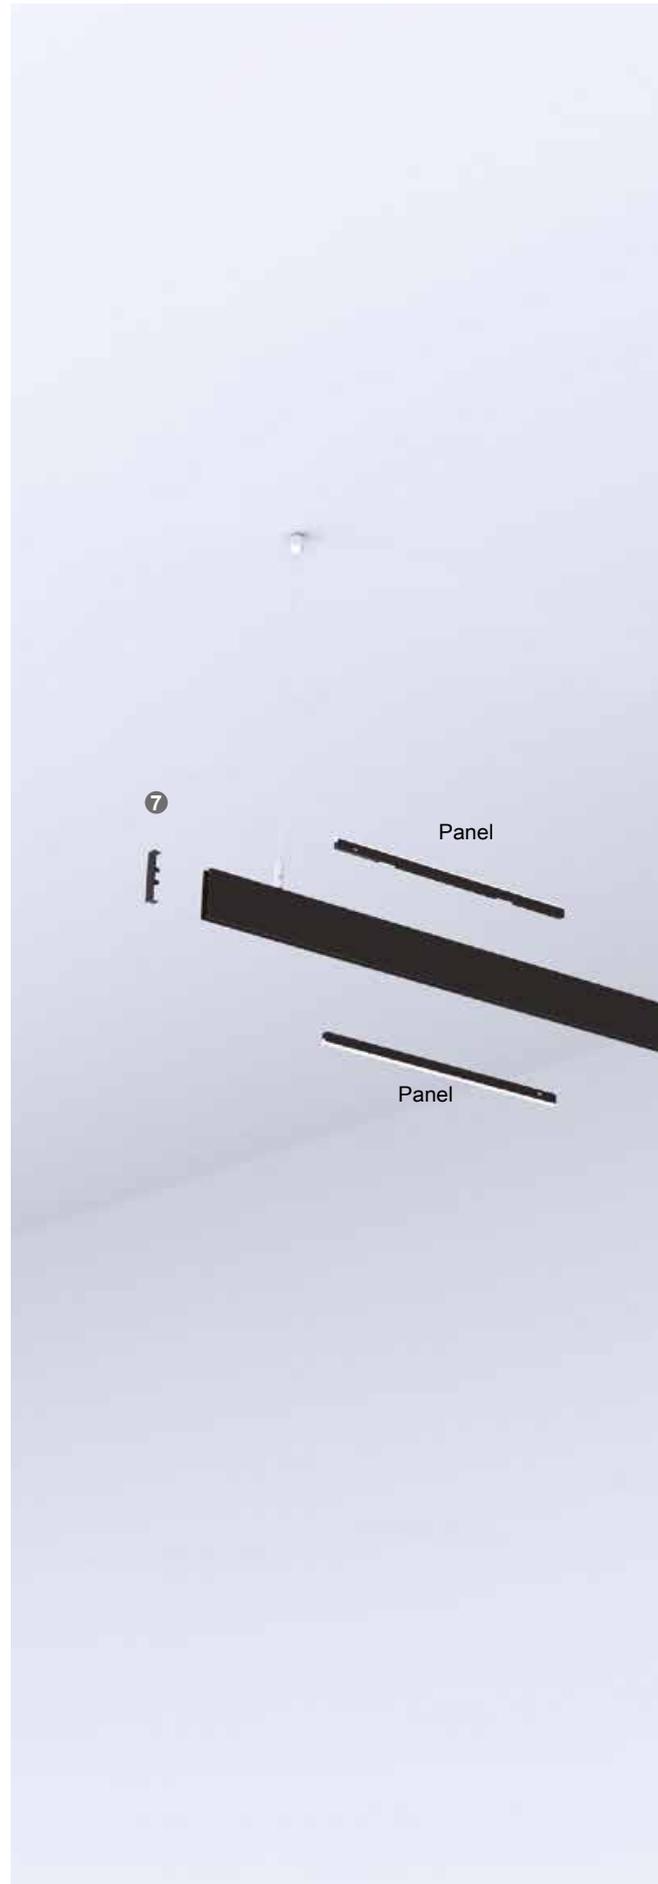


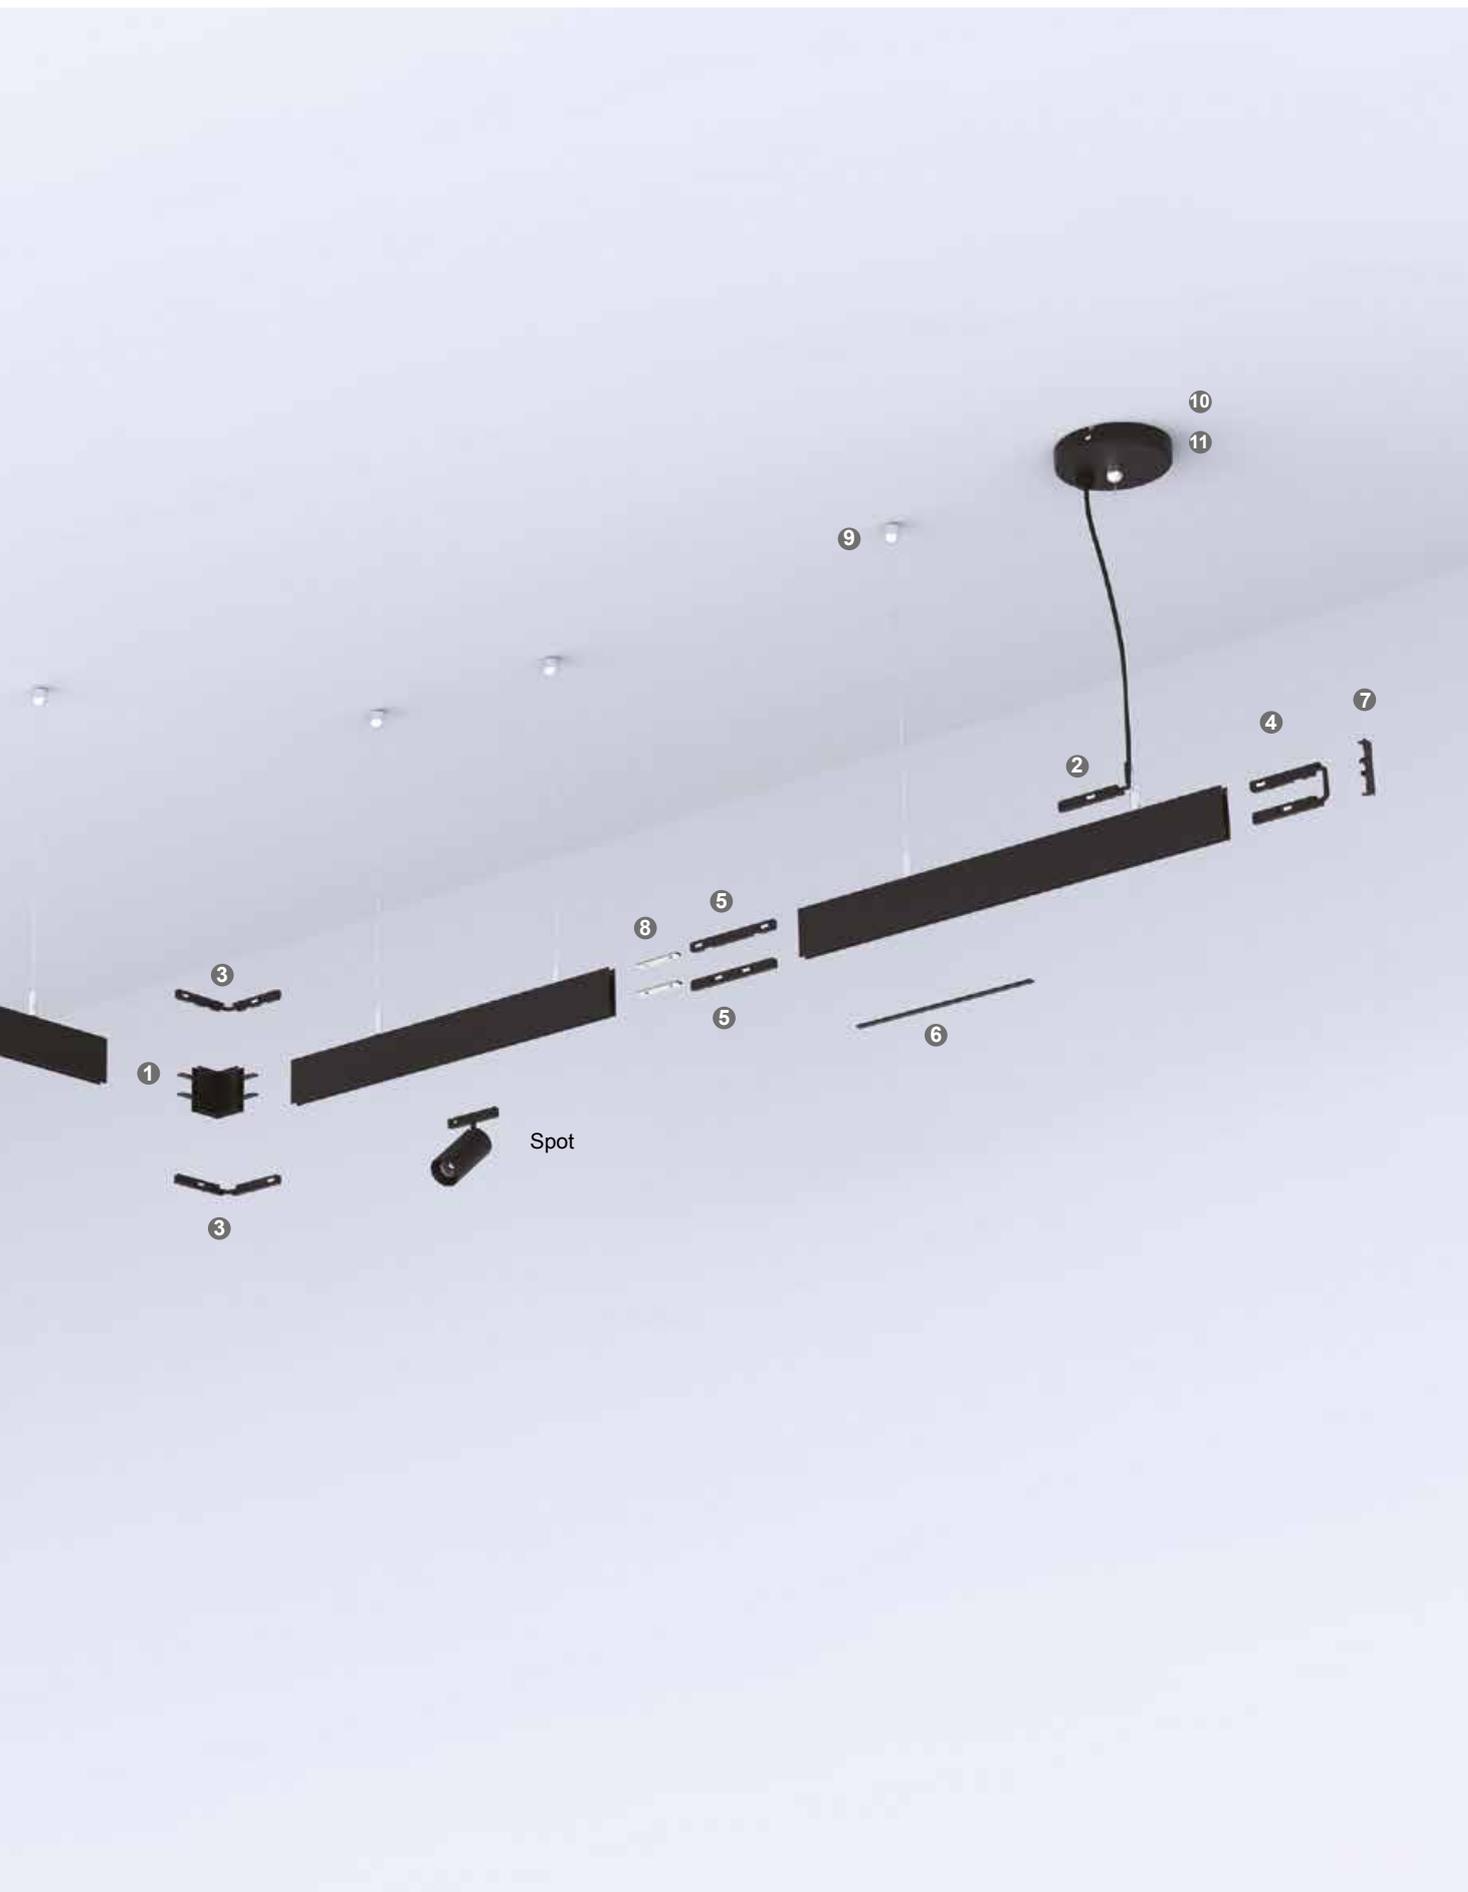

## 24V MODULES

		Series name	LED Consumption	Lumen
			4.3W 8.7W 13W	146 (lm) 287 (lm) 448 (lm)
			1.2W	96 (lm)
			2.6W	185 (lm)
		(Framing)	2.3W	164 (lm)
			6.5W	668 (lm)
		(Zoomable)	6.5W	317 (lm)

# Showcase Spot-Framing

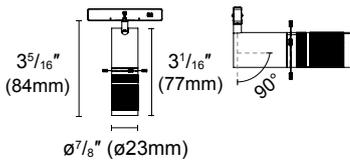


Article number	<b>73302</b>
Fixture Consumption	2.3W
Voltage	24 VDC
Lumen	164 (lm)
Beam Angle	18°~35° (Lens)
CCT	3000K
CRI	90+
Colour	Black ■





7331X  
Color filter



7331X  
please contact with our sales rep for more info

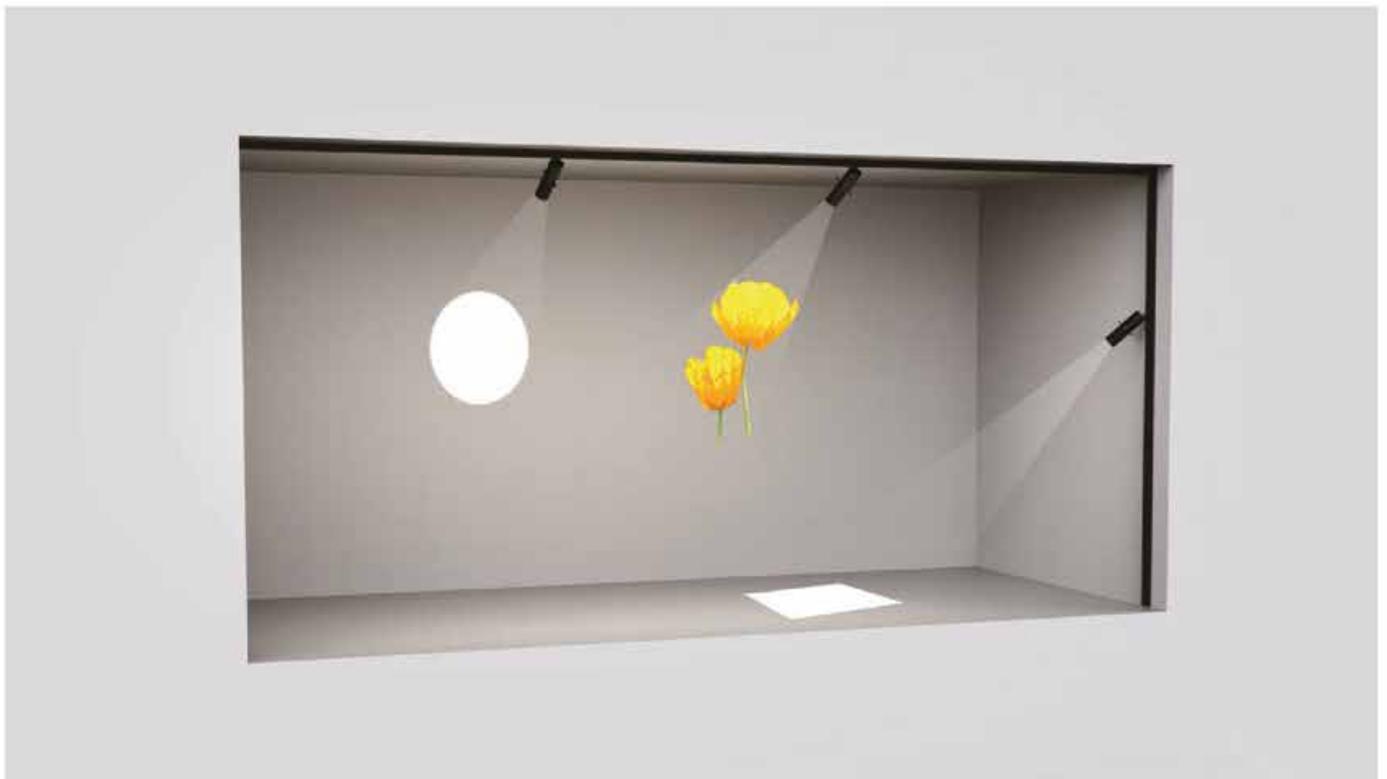

# Showcase Spot




Snoot

Fixture Consumption	1.2W
Voltage	24 VDC
Delivered Lumen	96 (lm)
Beam Angle	25°/35°/50° (Lens)
CCT	3000K
CRI	90+
Colour	Black ■

73232



Spot  
73232




H(m)	D(m)	E(lx)
<b>25°</b>		
1.0	0.46	163
2.0	0.92	40
3.0	1.38	18
4.0	1.84	10
5.0	2.31	6

73242



Spot  
73242




H(m)	D(m)	E(lx)
<b>35°</b>		
1.0	0.60	153
2.0	1.20	38
3.0	1.80	17
4.0	2.41	9
5.0	3.01	6


73252




Spot  
73252



H(m)	D(m)	E(lx)
<b>50°</b>		
1.0	0.92	82
2.0	1.84	20
3.0	2.76	9
4.0	3.68	5
5.0	4.60	3



Fixture Consumption	2.6W
Voltage	24 VDC
Delivered Lumen	185 (lm)
Beam Angle	16°/25°/45°/60° (Lens)
CCT	3000K
CRI	90+
Colour	Black ■



Honeycomb louver



Asymmetric Diffusers




Diffusers

73262



Spotlight  
73262




H(m)	D(m)	E(lx)
<b>16°</b>		
1.0	0.29	1024
2.0	0.59	256
3.0	0.88	113
4.0	1.17	63
5.0	1.46	40

73272



Spotlight  
73272




H(m)	D(m)	E(lx)
<b>25°</b>		
1.0	0.43	569
2.0	0.87	142
3.0	1.30	63
4.0	1.74	35
5.0	2.17	22

73282



Spotlight  
73282




H(m)	D(m)	E(lx)
<b>45°</b>		
1.0	0.82	195
2.0	1.64	48
3.0	2.46	21
4.0	3.27	12
5.0	4.09	7

73292





Spotlight  
73292



H(m)	D(m)	E(lx)
<b>60°</b>		
1.0	1.05	123
2.0	2.10	30
3.0	3.15	13
4.0	4.20	7
5.0	5.24	4

# Showcase Spot



7344X Honeycomb louver



7344X Asymmetric Diffusers



7344X Diffusers



7344X Barndoor

\* Barndoor is not suitable for vertical installation

Article number **73402, 73412, 73422, 73432**

Fixture Consumption 6.5W

Voltage 24 VDC

Lumen 799 (lm)

Delivered Lumen 668 (lm)

Beam Angle 24°/30°/40°/60° (Lens)

CCT 3000K

CRI 90+

Colour Black ■

Article number **73502, 73512, 73522, 73532**

Fixture Consumption 6.5W

Voltage 24 VDC

Lumen 799 (lm)

Delivered Lumen 543 (lm)

Beam Angle 24°/30°/40°/60° (Lens)

CCT 3000K

CRI 90+

Colour Black ■



7354X Honeycomb louver



7354X Asymmetric Diffusers




7354X Diffusers



7354X Barndoor

\* Barndoor is not suitable for vertical installation

Dimming



Article number **73602**

Fixture Consumption 6.5W

Voltage 24 VDC

Lumen 799 (lm)


Delivered Lumen 317 (lm)

Beam Angle 15°~40° (Lens)

CCT 3000K

CRI 90+



Colour Black ■



Zoomable

 **24°**



Spotlight



H(m)	D(m)	E(lx)
<b>24°</b>		
1.0	0.43	2123
2.0	0.87	530
3.0	1.30	235
4.0	1.73	130
5.0	2.17	84

 **30°**



Spotlight



H(m)	D(m)	E(lx)
<b>30°</b>		
1.0	0.53	1619
2.0	1.06	404
3.0	1.58	179
4.0	2.11	101
5.0	2.64	64

 **40°**


Spotlight



H(m)	D(m)	E(lx)
<b>40°</b>		
1.0	0.75	928
2.0	1.50	232
3.0	2.25	103
4.0	2.99	58
5.0	3.74	37

 **60°**



Spotlight



H(m)	D(m)	E(lx)
<b>60°</b>		
1.0	1.09	458
2.0	2.19	114
3.0	3.28	50
4.0	4.38	28
5.0	5.47	18

 **15°**



Spotlight



H(m)	D(m)	E(lx)
<b>15°</b>		
1.0	0.28	1079
2.0	0.56	269
3.0	0.84	119
4.0	1.13	67
5.0	1.41	43

 **40°**

Spotlight



H(m)	D(m)	E(lx)
<b>40°</b>		
1.0	0.69	538
2.0	1.39	134
3.0	2.08	59
4.0	2.78	33
5.0	3.47	21

# Showcase Panel



Article number	<b>73202</b>
Fixture Consumption	4.3W (72pcs)
Voltage	24 VDC
Delivered Lumen	146 (lm)
Beam Angle	120°
CCT	3000K
CRI	90+
Colour	Black ■



Article number	<b>73212</b>
Fixture Consumption	8.7W (144pcs)
Voltage	24 VDC
Delivered Lumen	287 (lm)
Beam Angle	120°
CCT	3000K
CRI	90+
Colour	Black ■




Article number	<b>73222</b>
Fixture Consumption	13W (216pcs)
Voltage	24 VDC
Delivered Lumen	448 (lm)
Beam Angle	120°
CCT	3000K
CRI	90+
Colour	Black ■




TRIM MODELS DIMENSIONS

73232 / 73242 / 73252



- L
- 73232 : 11<sup>7</sup>/<sub>16</sub>" (290mm)
  - 73242 : 22<sup>13</sup>/<sub>16</sub>" (580mm)
  - 73252 : 34<sup>5</sup>/<sub>8</sub>" (870mm)

120°



H(m)	D(m)	E(lx)
<b>120°</b>		
1.0	2.81	13
2.0	5.62	3
3.0	8.42	1
4.0	11.23	0
5.0	14.04	0





Phone +49 4242 84034-0  
info@ruteclightdesign.com  
www.ruteclightdesign.com