


VARDIFLEX Quantum IP65, 24V, 6,4W/m

81465-1125

MONTAGE- UND BETRIEBSANLEITUNG
MOUNTING AND OPERATING INSTRUCTIONS



IP65

ELEKTROTECHNISCHE SICHERHEITSHINWEISE:

Der **VARDIFLEX** LED-Strip ist für die Installation in trockenen und nassen Innenräumen sowie dem Außenbereich geeignet.

Stromschlaggefahr!

Beauftragen Sie mit der Installation eine Elektrofachkraft. Für Leuchten, die nicht gemäß den europäischen Sicherheitsrichtlinien installiert wurden, entfällt jeder Haftungsanspruch.

Achtung!

VARDIFLEX LED-Strip nur an geeignetes Netzgerät (24 V DC) anschließen.

Nur komplett abgerollt betreiben.

VARDIFLEX LED-Strips in Parallelschaltung verbinden.

LIEFERUMFANG:

1 x 1,125 Meter **VARDIFLEX** LED-Strip

PRÜFZEICHEN UND SYMBOLE:



CE-konform mit den zutreffenden europäischen Richtlinien.




RoHS-Prüfzeichen für Produkte, die keine Schwermetalle beinhalten (2011/65/EU)



REACH-Prüfzeichen für Produkte, deren chemische Bestandteile bekannt, registriert und zugelassen sind. (1907/2006/EG)



Schutzklasse III



Parallelanschluss:
Für die Durchgangsverdrahtung geeignet.

IP65

Strahlwassergeschützt. Ein Wasserstrahl aus einer Düse, aus allen Richtungen hat keine negativen Auswirkungen.



nicht UV-Beständig

TECHNISCHE DATEN:

Spannungsversorgung:

24 V Netzgerät mit konstanter Ausgangsspannung

Leistung:

6,4 W/m

Stromstärke:

0,30 A

Ausstrahlwinkel:

120°

Anzahl LED:

72

Länge:

Maximal 5 Meter pro Anschluss

Abmessungen: (L x B x H)

1125 x 11 x 2 mm

Biegedurchmesser:

60 mm

Lebensdauer:

L₇₀ B₅₀: 60.000 h

ENTSORGUNG:



Entsorgen Sie elektrische und elektronische Geräte umweltgerecht. Nähere Informationen erhalten Sie bei Ihrer zuständigen Behörde.

MONTAGE:

⚠ Vor der Installation Spannung abschalten. Sicherstellen, dass die Spannung nicht versehentlich wieder eingeschaltet werden kann.

ℹ **VARDIFLEX** LED-Strip, sofern vorhanden, erst an einen Controller und dann an das Netzgerät anschließen (nicht im Lieferumfang enthalten).

⚠ Achtung!

Bei stromführenden Oberflächen Isolierschicht zwischen **VARDIFLEX** LED-Strip und Oberfläche anbringen. Oberflächen müssen eben, staub- und fettfrei sowie trocken sein.


1. Oberfläche vorbereiten.
2. **VARDIFLEX** LED-Strip, falls erforderlich, kürzen (Bild 1).
3. Schutzfolie abziehen und **VARDIFLEX** LED-Strip mit leichtem Druck anpressen, dabei nicht direkt auf die elektronischen Bauteile drücken.
4. **VARDIFLEX** LED-Strip an Spannungsversorgung anschließen.

LED-PLATINE KÜRZEN:

⚠ Stromschlaggefahr!

Vor dem Kürzen immer Spannung freischalten.

VARDIFLEX LED-Strip kann jeweils nach **acht LEDs (125 mm)** getrennt werden (Bild 1).

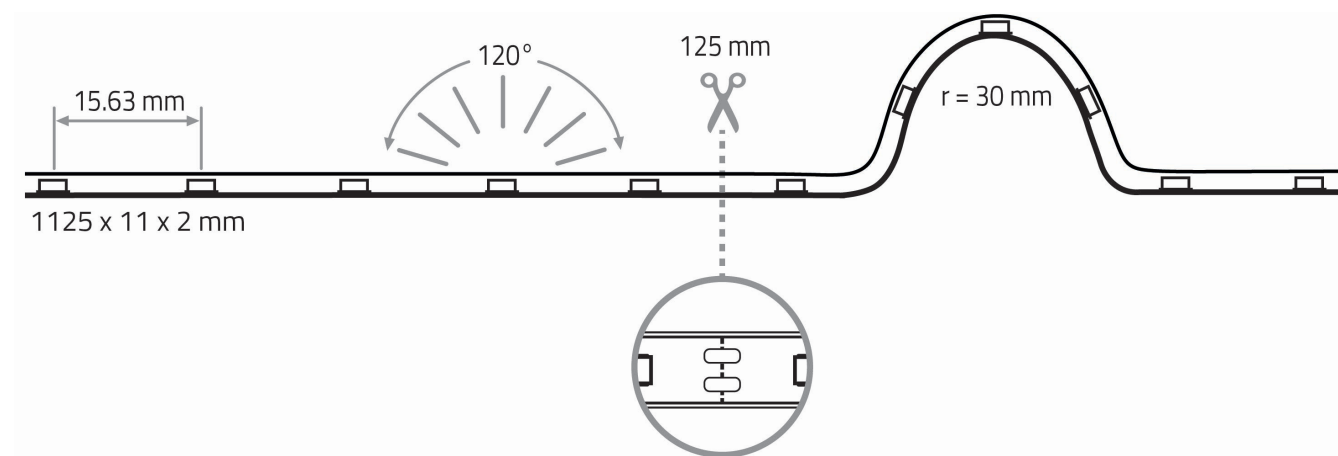

VARDIFLEX LED-Strip an der markierten Stelle trennen.

Bei eng bestückten LED-Strips wird ein Mikroseitenschneider oder optional ein Cutter benötigt!

⚠ Achtung!

Bei Lötverbindungen beachten: Löttemperatur 260° C und Löt-dauer maximal 10 Sekunden.

ELECTROTECHNICAL SAFETY INSTRUCTIONS:

The **VARDIFLEX** LED strip is suitable for installation in dry and wet interiors as well as outdoors.



Risk of electric shock!

Have the installation carried out by a qualified electrician. Any liability claim for **VARDIFLEX** LED strips that have not been installed in accordance with the European safety directives is void.



Caution!

Only connect the **VARDIFLEX** LED strip to a suitable power supply (24 V DC).
Only operate when completely unrolled.
Connect **VARDIFLEX** LED strips in parallel.

SCOPE OF DELIVERY:

1 x 1.125 meter **VARDIFLEX** LED strip

MARKS AND SYMBOLS:



Compliant with the applicable European CE directives




RoHS mark for products that do not contain heavy metals
(EC Directive 2002/95/EC)



REACH test mark for products whose chemical components are known, registered and authorised



Protection class III



Parallel connection:
Suitable for through-wiring.

IP65

Protected against water jets. A jet of water from a nozzle, from any direction, has no negative effects.



Not UV-resistant

TECHNICAL DATA:

Power supply:

24 V power supply with constant output voltage

Power:

6,4 W/m

Current strength:

0.30 A

Radiation angle:

120°

Quantity LED:

72

Length:

maximum 5 meters per connection

Dimensions: (L x W x H)

1125 x 11 x 2 mm

Bending diameter:

60 mm

Lifespan:

L₇₀ B₅₀: 60,000 h

DISPOSAL:




Dispose of electrical and electronic equipment in an environmentally sound manner. For more information, contact your local authority.

INSTALLATION:

- ⚠ Switch off voltage prior to installation. Ensure that voltage cannot be accidentally switched on again.
 - ℹ First connect the **VARDIFLEX** LED strip to an controller, if available, and then to the power supply (not included in the scope of delivery).
 - ⚠ **Caution!**
On conducting surfaces, place an insulation layer between the **VARDIFLEX** LED strip and surface. Surfaces must be flat, free of dust, grease and dry.
1. Prepare surface.
 2. Shorten **VARDIFLEX** LED strip if necessary (fig. 1).
 3. Peel off self adhesive film and gently press on **VARDIFLEX** LED strip, do not press directly on the LEDs.
 4. Connect **VARDIFLEX** LED strip to power supply.

SHORTENING THE LED STRIP:

- ⚠ **Risk of electric shock!**
Always disconnect the mains plug before shortening.
LED strip can be separated in each case after **eight LEDs (125 mm)** (fig. 1).

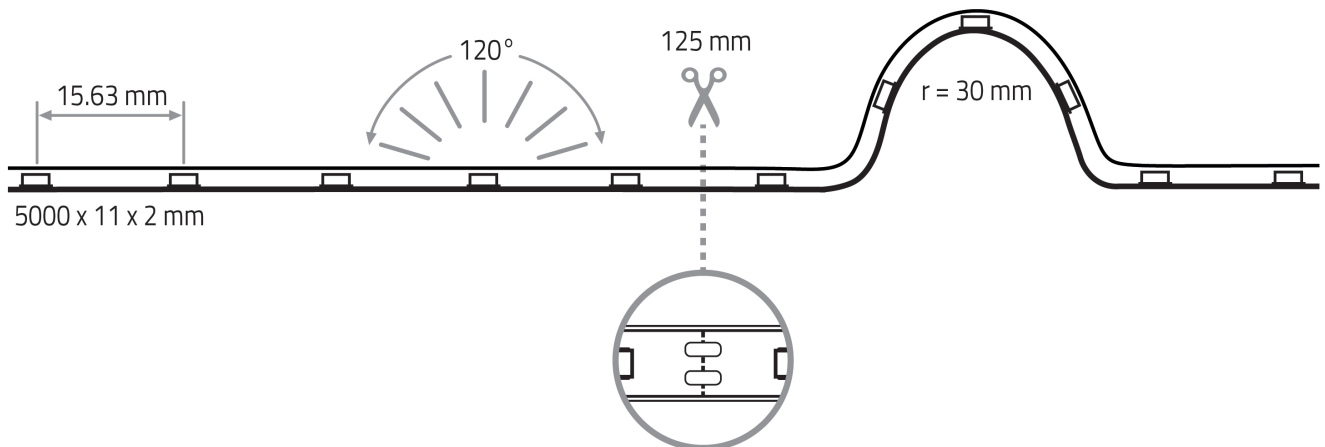

Separate the **VARDIFLEX** LED strip at the marked position. For a tightly assembled LED strip is a micro side cutter or an optional cutter required.

- ⚠ **Caution!**
With soldered connections note that the soldering temperature is 260° C and the soldering duration a maximum of 10 seconds per soldering point.

NOTIZEN:
NOTES:

