

KEMENTARI S316
RECESSED GROUND LIGHTS
PROJECTOR LIGHTS






R57564HPWWOK



R57563HPWWOK

TULKA 1 W LED light point 316 movable, IP65

- for indoor and outdoor use
- protection class IP65 - when fitted in enclosed ceilings
- 316 stainless steel
- light colour: 3000 K (± 200 K)
- power: 1 W
- current: 350 mA
- light flux: 118 lumen
- beam angle: 40°
- colour rendering: CRI 80
- lifespan L70: $\geq 30,000$ hours
- if cherish carefully - suitable for seaside
- **no LED constant current converter 350 mA included - please order separately**

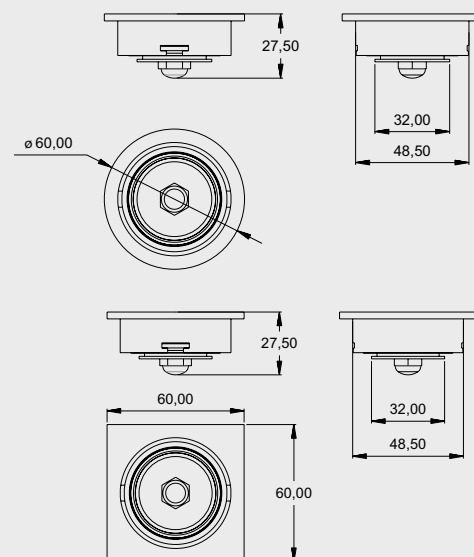

Energy efficiency
class

ORDERING INFORMATION

Type	Light colour K	Outer Diameter mm		Depth mm	Article no. 316-High Polish
circular	3000	Ø 60	Ø 50 mm	35	R57564HPWWOK
square	3000	60 x 60	Ø 50 mm	35	R57563HPWWOK

Stainless steel surfaces need regular care. Please do not use acid cleaning products. We recommend our article 55317 (surface cleaner) and article 55316 (sponge) for cleaning.

Matching control gear - please order separately.

Type	Input AC oder DC	Output mA	Output V DC	Power Watt	Dimension mm	Temperature range °C	Article no.
Converter	100 - 240 V AC	350	3 - 8	1 - 2	42 x 29.5 x 24	- 20 - +40	85439
Dimmable 1 - 10 V	12 - 24 V DC	350	-	4 x 4.2 (12 V), 8.4 (24 V)	166 x 54 x 23	- 20 - +50	80475
Dimmable KNX	12 - 24 V DC	350	-	4 x 4.2 (12 V), 8.4 (24 V)	166 x 54 x 23	- 20 - +50	80110
Dimmable DALI	100 - 240 V AC	350	3 - 48	16	210 x 50 x 32	- 20 - +50	80790

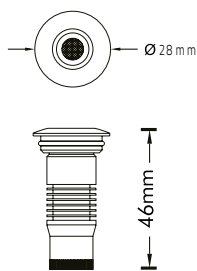


Foto: slavun@fotolia.com

Kementari 1.4-CV recessed ground light

1.4 W, stainless steel 316, IP67

- for indoor and outdoor use
- Input: 12 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K, 6000 K, R/G/Y/B
- light flux: 75 - 80 lumen
- beam angle: 10°, 17°, 25°, 40°, 60°, 120°
- CRI > 80
- dimensions: 28 x 44 mm (diameter x height)
- no low voltage constant current converter included - please order separately



Energy efficiency
class

B

ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm		Depth mm	Beam angle °	Article no.
3000 K	75	28	25	56	10	59415
4000 K	75	28	25	56	10	59418
3000 K	75	28	25	56	17	59425
4000 K	75	28	25	56	17	59428
3000 K	75	28	25	56	25	59435
4000 K	75	28	25	56	25	59438
3000 K	75	28	25	56	40	59445
4000 K	75	28	25	56	40	59448
3000 K	75	28	25	56	60	59455
4000 K	75	28	25	56	60	59458
3000 K	75	28	25	56	120	59465
4000 K	75	28	25	56	120	59468



Фото: Александр Бечанский@iStockphoto.com

Kementari 1-S316-CV recessed ground light
1 W, stainless steel 316, IP67

- for indoor and outdoor use
- Input: 12 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K, 6000 K, R/G/Y/B
- light flux: 95 - 100 lumen
- beam angle: 120°
- CRI 90
- dimensions: 40 x 12 mm (diameter x height)
- no low voltage constant current converter included - please order separately



Energy efficiency class **B**

ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm		Depth mm	Beam angle °	Article no.
3000 K	95	40	38	12	120	59575
4000 K	95	40	38	12	120	59578



Foto: burnel11@adobeStock.com

Kementari 3-CV recessed ground light 3 W, stainless steel 316, IP67



- for indoor and outdoor use
- Input: 12 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K, 6000 K, R/G/Y/B
- light flux: 100 - 130 lumen
- beam angle: 25°, 40°, 60°
- CRI 90
- dimensions: 40 x 77 mm (diameter x height)
- no low voltage constant current converter included - please order separately



Energy efficiency class **B**



IP67





ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm		Depth mm	Beam angle °	Article no.
3000 K	110	40	34	90	25	59475
4000 K	110	40	34	90	25	59478
3000 K	110	40	34	90	40	59485
4000 K	110	40	34	90	40	59488
3000 K	110	40	34	90	60	59495
4000 K	110	40	34	90	60	59498



Kementari 2-S316-CV recessed ground light 2 W, stainless steel 316, IP67

- for indoor and outdoor use
- Input: 12 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K, 6000 K
- light flux: 10 - 12 lumen
- beam angle: 120°
- CRI 90
- dimensions: 44 x 40 mm (diameter x height)
- no low voltage constant current converter included - please order separately



Energy efficiency
class



ORDERING INFORMATION



Type	Light flux lm	Outer Diameter mm		Depth mm	Beam angle °	Article no.
3000 K	10	44	40	60	25	59585
4000 K	10	44	40	60	25	59588
3000 K	10	44	40	60	40	59595
4000 K	10	44	40	60	40	59598

Foto: alexandre zweiger@adobestock.com



Kementari 1.5-S316-CV recessed ground light
1.5 W, stainless steel 316, IP67

- for indoor and outdoor use
- Input: 12 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K, 6000 K, R/G/B/A
- light flux: 90 - 95 lumen
- beam angle: 10°, 17°, 25°, 40°, 60°, 120° optional
- CRI 90
- dimensions: 40 x 36 mm (diameter x height)
- no low voltage constant current converter included - please order separately



Energy efficiency
class




ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm		Depth mm	Beam angle °	Article no.
3000 K	95	45	40	60	10	59845
4000 K	95	45	40	60	10	59848
3000 K	95	45	40	60	17	59855
4000 K	95	45	40	60	17	59858
3000 K	95	45	40	60	25	59865
4000 K	95	45	40	60	25	59868
3000 K	95	45	40	60	40	59875
4000 K	95	45	40	60	40	59878
3000 K	95	45	40	60	60	59885
4000 K	95	45	40	60	60	59888
3000 K	95	45	40	60	120	59895
4000 K	95	45	40	60	120	59898



Kementari Nano recessed ground light SMD, with 8 mm tempered glass lens, IP68 (5 meter)

- for indoor, outdoor and underwater use
- direct illumination
- suitable for indoor applications in bathrooms, kitchen, bars when lens may be touched without injury
- stainless steel 316 and anodized aluminium
- 1,000 kg „driver over“ performance
- Input: 12 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K
- power: 1.6 W
- light flux: 120 - 140 lumen
- beam angle: 15°, 25°, 40°
- CRI 90
- lifespan L80: ≥ 50,000 hours

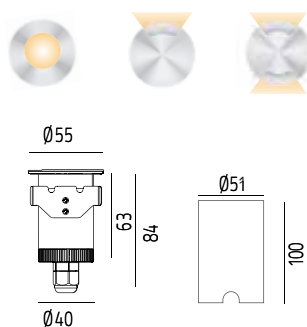

flat Energy efficiency class **B**

2 way Energy efficiency class **C**

1 way Energy efficiency class **D**


ORDERING INFORMATION

Type	Light flux lm	Version	Outer Diameter mm		Depth mm	Beam angle °	Article no.
3000 K	120	flat	55	Ø 51 mm	100	15	59305
4000 K	140	flat	55	Ø 51 mm	100	15	59308
3000 K	120	flat	55	Ø 51 mm	100	25	59315
4000 K	140	flat	55	Ø 51 mm	100	25	59318
3000 K	120	flat	55	Ø 51 mm	100	40	59325
4000 K	140	flat	55	Ø 51 mm	100	40	59328
3000 K	10	1 way	55	Ø 51 mm	100	-	59335
4000 K	11	1 way	55	Ø 51 mm	100	-	59338
3000 K	15	2 way	55	Ø 51 mm	100	-	59345
4000 K	17	2 way	55	Ø 51 mm	100	-	59348





Kementari 3 Plus recessed ground light 3 W, stainless steel 316, IP67

- for indoor and outdoor use
- Input: 12 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K, 6000 K, R/G/B/Y
- light flux: 95 - 100 lumen
- beam angle: 1 x 100°, 2 x 100°, 3 x 100°, 4 x 100°
- colour rendering: CRI 90
- dimensions: 60 x 75 mm (diameter x height)
- no low voltage constant current converter included - please order separately

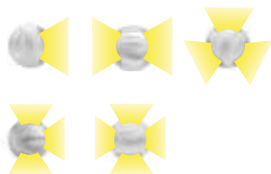

IP67



Energy efficiency
class



ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm		Depth mm	Beam angle °	Article no.
3000 K	95	60	40	90	1 x 100	59955
4000 K	95	60	40	90	1 x 100	59958
3000 K	95	60	40	90	2 x 100	59965
4000 K	95	60	40	90	2 x 100	59968
3000 K	100	60	40	90	3 x 100	59975
4000 K	100	60	40	90	3 x 100	59978
3000 K	100	60	40	90	3 x 100	59915
4000 K	100	60	40	90	3 x 100	59918
3000 K	100	60	40	90	4 x 100	59985
4000 K	100	60	40	90	4 x 100	59988



Foto: Pavel Losevsky@stock.adobe.com

Kementari Mini S316 recessed ground light SMD, with 8 mm tempered glass lens, IP68 (5 meter)


- for indoor, outdoor and underwater use
- direct illumination
- suitable for indoor applications in bathrooms, kitchen, bars when lens may be touched without injury
- stainless steel 316
- 1,000 kg „driver over” performance
- Input: 12 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K
- power: 4.3 W
- light flux: 380 - 420 lumen
- beam angle: 15°, 40°, 60°
- CRI 90
- lifespan L80: ≥ 50,000 hours



59355



IP68



Energy efficiency
class

B

ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm		Depth mm	Beam angle °	Article no.
3000 K	380	90	Ø 82 mm	100	15	59355
4000 K	420	90	Ø 82 mm	100	15	59358
3000 K	380	90	Ø 82 mm	100	40	59365
4000 K	420	90	Ø 82 mm	100	40	59368
3000 K	380	90	Ø 82 mm	100	60	59375
4000 K	420	90	Ø 82 mm	100	60	59378




Kementari Maxi S316 recessed ground light SMD, with 8 mm tempered glass lens, IP68 (5 meter)

- for indoor, outdoor and underwater use
- direct illumination
- suitable for indoor applications in bathrooms, kitchen, bars when lens may be touched without injury
- stainless steel 316
- 1,000 kg „driver over” performance
- Input: 20 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K
- power: 11 W
- light flux: 1000 - 1100 lumen
- beam angle: 20°, 30°, 60°
- CRI 90
- lifespan L80: ≥ 50,000 hours



59625



IP68



Energy efficiency
class



ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm		Depth mm	Beam angle °	Article no.
3000 K	1000	90	Ø 82 mm	180	20	59605
4000 K	1100	90	Ø 82 mm	180	20	59608
3000 K	1000	90	Ø 82 mm	180	30	59615
4000 K	1100	90	Ø 82 mm	180	30	59618
3000 K	1000	90	Ø 82 mm	180	60	59625
4000 K	1100	90	Ø 82 mm	180	60	59628



Foto: Travis@stockadobe.com

Kementari Mini S316 projector light SMD, movable 130°, with tempered glass, IP68 (5 meter)


- for indoor, outdoor, salt water and underwater use
- direct illumination
- stainless steel 316
- Input: 12 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K
- power: 4.8 W
- light flux: 380 - 420 lumen
- beam angle: 15°, 40°, 60°
- CRI 90
- lifespan L80: ≥ 50,000 hours



59745

Energy efficiency
class

B



ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm	Holder size mm	Body size mm	Beam angle °	Article no.
3000 K	380	68	67	54	15	59725
4000 K	420	68	67	54	15	59728
3000 K	380	68	67	54	40	59735
4000 K	420	68	67	54	40	59738
3000 K	380	68	67	54	60	59745
4000 K	420	68	67	54	60	59748




Kementari Maxi S316 projector light SMD, movable 130°, with tempered glass, IP68 (5 meter)

- for indoor, outdoor, salt water and underwater use
- direct illumination
- stainless steel 316
- Input: 20 - 24 V DC
- light colour: 2700 K, 3000 K, 4000 K
- power: 11.5 W
- light flux: 1000 - 1100 lumen
- beam angle: 20°, 30°, 60°
- CRI 90
- lifespan L80: ≥ 50,000 hours



59785



Energy efficiency
class



ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm	Holder size mm	Body size mm	Beam angle °	Article no.
3000 K	1000	68	83	100	20	59765
4000 K	1100	68	83	100	20	59768
3000 K	1000	68	83	100	30	59775
4000 K	1100	68	83	100	30	59778
3000 K	1000	68	83	100	60	59785
4000 K	1100	68	83	100	60	59788



Spotlight CW 1 par light outdoor, IP65

- for indoor, outdoor and salt water use
- 7 LED
- direct illumination
- diecast aluminium, black
- Input: 100-240 V DC
- light colour: 6500 K
- power: 7x 15 W
- light flux: 1000 lumen
- beam angle: 40°
- electronic dimmer from 0-100%
- control mode: Auto, Master/Slave
- strobe: 0-16 Hz, from slow to fast
- DMX512 signal; DMX channels: 12 channels
- dta out/in: 3 pin XLR-connection
- with balances relief valve for pressure
- lifespan L80: ≥ 30,000 hours



Energy efficiency
class

B



ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm	Holder size mm	Body size mm	Beam angle °	Article no.
6500	1000	170	150	170	40	71001



Spotlight RGBAW+UV 6 in 1 par light outdoor, IP65

- for indoor, outdoor and salt water use
- 12 RGBWA-UV 6 in one par light has amber + UV
- direct illumination
- diecast aluminium, white
- Input: 100-240 V DC
- power: 12 x 15 W
- light flux: 1800 lumen
- beam angle: 25°
- Eelectronic dimmer from 0-100%
- control mode: Auto, Master/Slave
- strobe: 0-16 Hz, from slow to fast
- DMX512 signal; DMX channels: 10 or 6 channels
- Data out/in: 3 pin XLR-connection
- with balances relief valve for pressure
- lifespan L80: ≥ 30,000 hours



Energy efficiency
class



ORDERING INFORMATION

Type	Light flux lm	Outer Diameter mm	Holder size mm	Body size mm	Beam angle °	Article no.
RGBAW+UV	1800	220	265	280	25	71000

TAYLORMADE. LIGHT. DESIGN.



info@ruteclightdesign.com
www.ruteclightdesign.com