



INSTALLATION INSTRUCTION


- 1.The fixture is display case lighting.
- 2.Before installation,make sure that the power supply is off.
- 3.Follow the steps as shown below for installation.
- 4.After finishing every step, tighten the screws, have the fixture fixed,then connect the power supply.
- 5.It is recommended that these products are installed by a qualified electrician.
- 6.The light source in this luminaire should be replaced by the manufacturer or its service agent or similarly qualified person.
- 7.Under no circumstances should the luminaire be covered by thermal insulation pads and similar materials.
- 8.Install per national installation and accident prevention regulations.
- 9.The luminaire may not be mounted in the hand area.
- 10.Recommended room temperature: 35 °C.
- 11.Do not stare at the light source.
- 12.Protection class III with SELV supply!

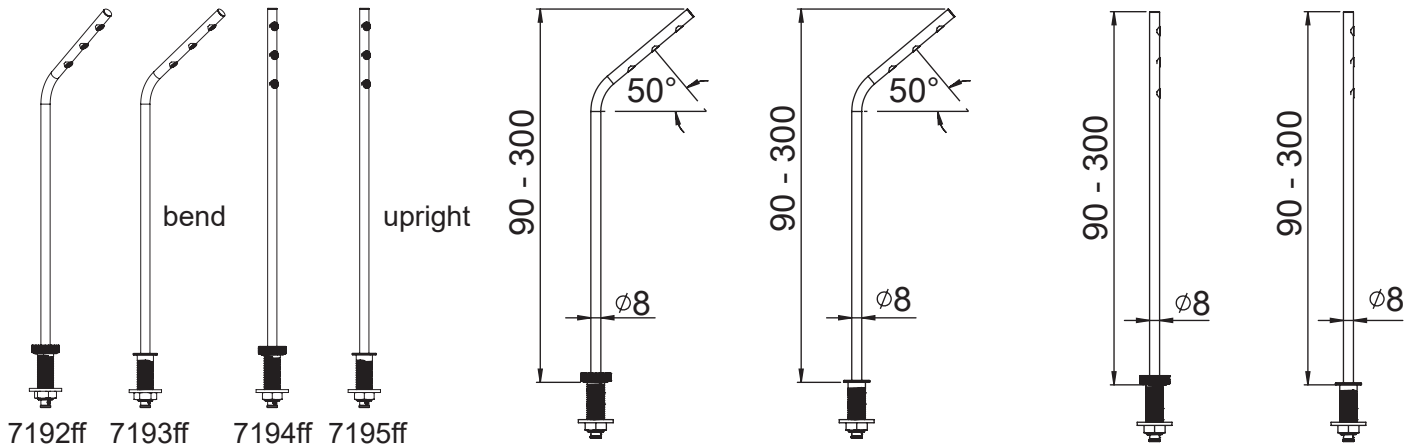


Assembling diagram:

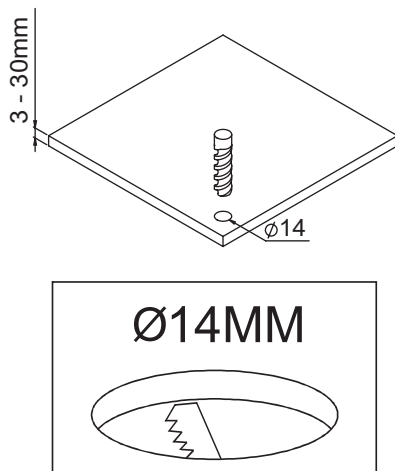


7192ff/7194ff

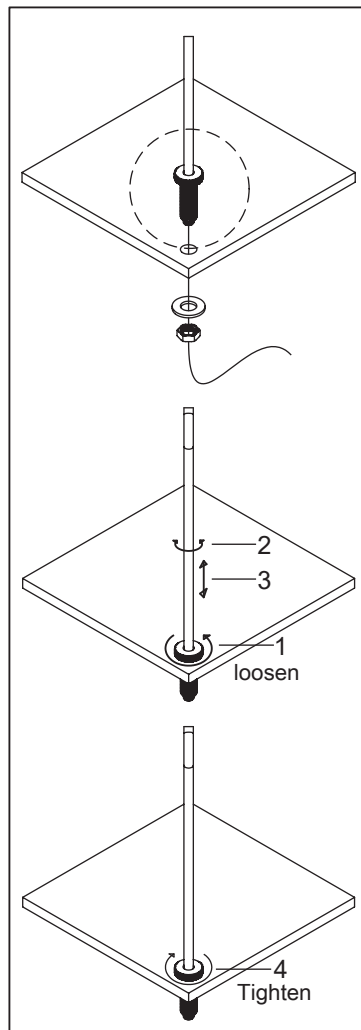

7193ff/7195ff

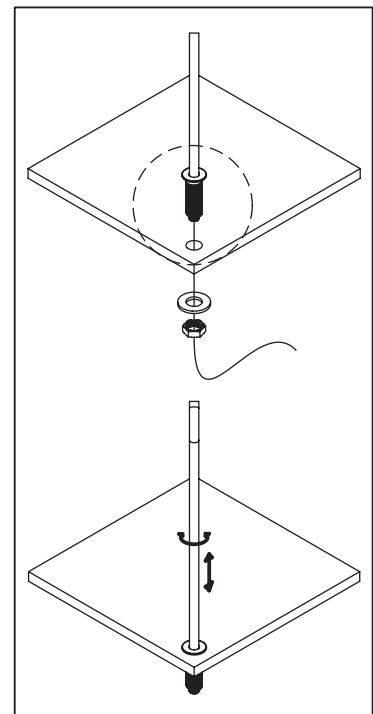

WIRING DIAGRAM

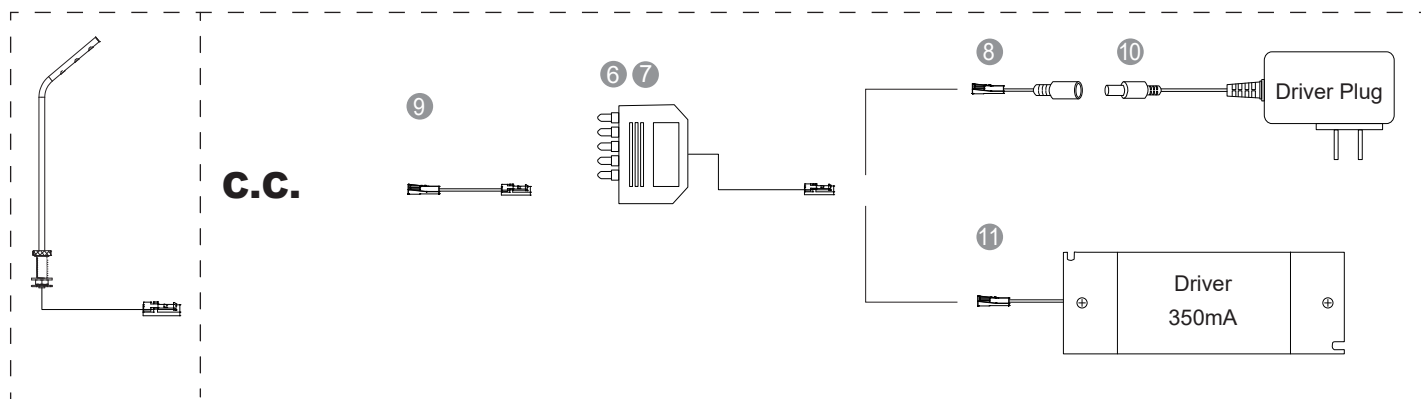

C.C Accessory(Constant Current)

	59220 59221 Type: TOP junction box	6 way series connection cord 3 way series connection cord Length : 6"(15.24cm)
	59222 Type: Driver connection	Driver connection cord Length : 3.94"(10cm)
	59223 Type: Connection	Connection cord Length : 36"(91.44cm)
	59228 59229 Type: Driver Plug	I/P: 100-240V, O/P: 350mA/3-36VDC/max.8w CE/UL/CUL 3W x 1-2 pcs
	59230 Type: Driver	I/P: 100-277V, O/P: 350mA/5-40VDC/max.20w CE/ENEC/CCC/CUL 3W x 1-4 pcs